



Advanced Technology. Simple Solutions.

CONTINUOUS BUS SPLITTER TROUGH (3 BAR)


VBG1-3B

The VSBG1 continuous bus splitter trough is used for indoor applications for power distribution. The bus bars are tin-plated aluminum and mounted on offset steps to enable simple cable termination. Bent edges and handholds on the screw-on-style lid allow easy field installation. The enclosures are manufactured with galvanized steel for additional corrosion protection and are finished with PC101 (ANSI 61) Grey powder coat paint.

Features / Specifications

- Galvanized steel construction
- CSA Type 1 rated
- 600V, 3 bar
- Raised rear-mounting holes
- Screw-on covers with handholds
- 800A and above minimum 50KA bus bracing
- PC101 (ANSI 61) Grey powder coat finish
- Type 3R and 4 available*
- Line and load lugs available
- Custom sizes, materials, and colours available

*Contact Valid for all available options.

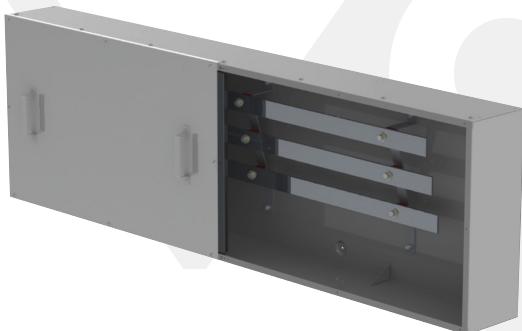

| PART NUMBER | AMPS | HEIGHT | WIDTH | DEPTH |
|------------------|------|--------|--------|-------|
| VBG1-3B-400-36 | 400 | 22 in | 36 in | 8 in |
| VBG1-3B-400-48 | 400 | 22 in | 48 in | 8 in |
| VBG1-3B-400-72 | 400 | 22 in | 72 in | 8 in |
| VBG1-3B-400-96 | 400 | 22 in | 96 in | 8 in |
| VBG1-3B-400-120 | 400 | 22 in | 120 in | 8 in |
| VBG1-3B-600-36 | 600 | 22 in | 36 in | 8 in |
| VBG1-3B-600-48 | 600 | 22 in | 48 in | 8 in |
| VBG1-3B-600-72 | 600 | 22 in | 72 in | 8 in |
| VBG1-3B-600-96 | 600 | 22 in | 96 in | 8 in |
| VBG1-3B-600-120 | 600 | 22 in | 120 in | 8 in |
| VBG1-3B-800-48 | 800 | 28 in | 48 in | 9 in |
| VBG1-3B-800-72 | 800 | 28 in | 72 in | 9 in |
| VBG1-3B-800-96 | 800 | 28 in | 96 in | 9 in |
| VBG1-3B-800-120 | 800 | 28 in | 120 in | 9 in |
| VBG1-3B-800-144 | 800 | 28 in | 144 in | 9 in |
| VBG1-3B-1000-72 | 1000 | 28 in | 72 in | 9 in |
| VBG1-3B-1000-96 | 1000 | 28 in | 96 in | 9 in |
| VBG1-3B-1000-120 | 1000 | 28 in | 120 in | 9 in |
| VBG1-3B-1000-144 | 1000 | 28 in | 144 in | 9 in |
| VBG1-3B-1200-72 | 1200 | 28 in | 72 in | 9 in |
| VBG1-3B-1200-96 | 1200 | 28 in | 96 in | 9 in |
| VBG1-3B-1200-120 | 1200 | 28 in | 120 in | 9 in |
| VBG1-3B-1200-144 | 1200 | 28 in | 144 in | 9 in |
| VBG1-3B-1600-72 | 1600 | 34 in | 72 in | 12 in |
| VBG1-3B-1600-96 | 1600 | 34 in | 96 in | 12 in |
| VBG1-3B-1600-120 | 1600 | 34 in | 120 in | 12 in |
| VBG1-3B-1600-144 | 1600 | 34 in | 144 in | 12 in |
| VBG1-3B-2000-144 | 2000 | 34 in | 144 in | 12 in |
| VBG1-3B-2500-144 | 2500 | 34 in | 144 in | 12 in |