



Advanced Technology. Simple Solutions.

MMCD STYLE BASE SERVICE DISCONNECT


BSD1X24CQ

Features / Specifications

- Service entrance rated
- CSA Type 3R rated
- Available in:
 - Marine-grade aluminum powder coated PC101 Grey
 - Stainless Steel 304 grade with natural finish
- 60A AC1 40A AC3 3P lighting contactor - p/n: LC1D40AG7
- 22kA rated main breaker
- 3 position Hand-Off-Auto (HOA) photocell bypass switch
- Lock-out tab on main breaker
- Termination block for PEC
- Distribution lug for power terminations
- 8 cct panel
- 1P 15A control system breaker
- Fits standard streetlight base
- Designed to MMCD E7.6

Options

- 10kA main breaker
- Surge protection devices
- Sub-breakers as required
- Fuse holder
- Additional lighting contactor

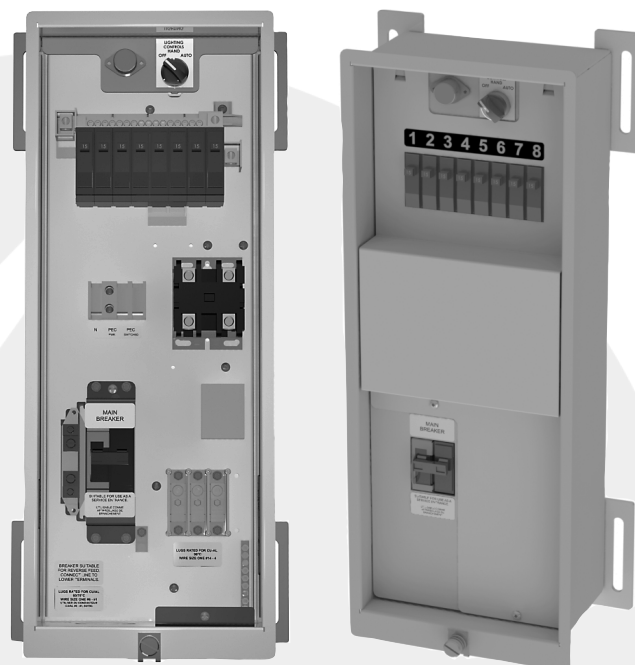

Front View
(Lid and Cover Removed)

Isometric View
(Lid Removed)

22 kAIC Main Breaker

PART NUMBER	MATERIAL	MAIN BREAKER
BSD1A24CQ-4-H	ALUMINUM	40A
BSD1S24CQ-4-H	STAINLESS STEEL	40A
BSD1A24CQ-6-H	ALUMINUM	60A
BSD1S24CQ-6-H	STAINLESS STEEL	60A
BSD1A24CQ-H	ALUMINUM	100A
BSD1S24CQ-H	STAINLESS STEEL	100A

* Standard with 100A main breaker

