



Advanced Technology. Simple Solutions.


UNIT SUBSTATION - SINGLE-PHASE

ASKA

This unit substation is designed to provide step-down power for areas such as campgrounds, parking lots, marinas, and other facilities requiring portable power applications. This unit is for use in single-phase applications from 600V feed.



Features / Specifications

- Steel construction
- CSA Type 3R rated
- Removable lifting ears
- Padlockable 3-point handle
- Louvers with bug screens
- Deadfront wireways (conduit extensions not required)
- Customer-specific breaker panel
- Single-phase units
- Distribution transformer
- Fan cooled
- PC101 Grey powder coat finish

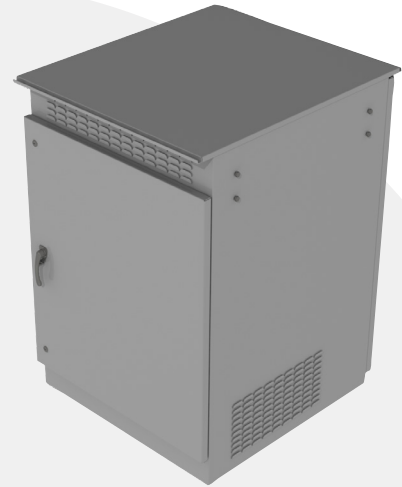

Options

- Stainless steel or aluminum construction
- Primary breaker protection
- Sub-breakers as required
- Meter base
- Heater and thermostat
- Additional cooling fans and controls
- Up to 22kAIC rated breakers
- Lighting contactors and photocell
- Side-mounted receptacles
- Custom powder coat colours

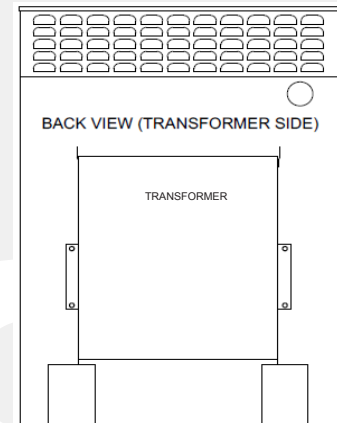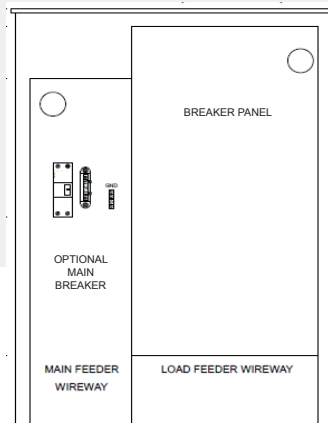

PART NUMBER	HEIGHT	WIDTH	DEPTH	TRANS KVA	TRANS PRIMARY	TRANS SECONDARY	PANEL CCTS
ASKA1-5	36 in	24 in	24 in	5	600V	120/240V	18
ASKA1-7.5	36 in	24 in	24 in	7.5	600V	120/240V	18
ASKA1-10	48 in	34 in	34 in	10	600V	120/240V	18
ASKA1-15	48 in	34 in	34 in	15	600V	120/240V	18
ASKA1-25	48 in	34 in	34 in	25	600V	120/240V	18
ASKA1-37.5	60 in	42 in	42 in	37.5	600V	120/240V	30
ASKA1-50	60 in	42 in	42 in	50	600V	120/240V	30
ASKA1-75	60 in	42 in	42 in	75	600V	120/240V	30
ASKA1-100	60 in	42 in	42 in	100	600V	120/240V	30