



Advanced Technology. Simple Solutions.

MMCD STYLE BASE SERVICE DISCONNECT


BSD1X24CQ

Features / Specifications

- Service entrance rated
- CSA Type 3R rated
- Available in:
 - Marine-grade aluminum powder coated PC101 Grey
 - Stainless steel 304 finish
- 60A AC1 40A AC3 3P lighting contactor - p/n: LC1D40AAG7
- 10kA rated main breaker
- 3-position rotary photocell bypass switch
- Lock-out tab on main breaker
- Termination block for PEC
- Distribution lug for power terminations
- 8 cct panel
- 1P 15A control system breaker
- Cutout for optional fuse holder
- Fits standard streelight base
- Designed to MMCD E7.6

Options

- 22 kAIC rated main breaker
- Sub-breakers as required
- 4-pole contactor

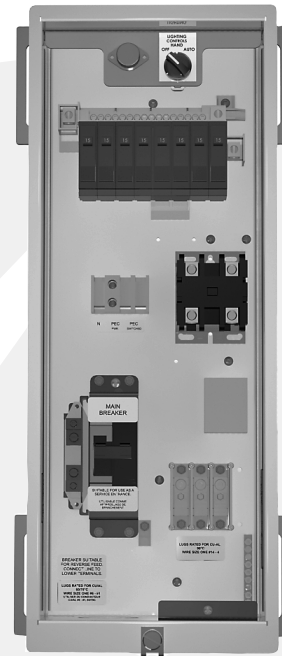

Front View
(Lid and Cover Removed)



Isometric View
(Lid Removed)

10 kAIC Main Breaker

PART NUMBER	MATERIAL	MAIN BREAKER
BSD1A24CQ	ALUMINUM	100A
BSD1S24CQ	STAINLESS STEEL	100A

22 kAIC Main Breaker

PART NUMBER	MATERIAL	MAIN BREAKER
BSD1A24CQ-H	ALUMINUM	100A
BSD1S24CQ-H	STAINLESS STEEL	100A

