



Advanced Technology. Simple Solutions.

LIGHTING DISTRIBUTION CONTROL CABINET



EPL

Features / Specifications

- Marine-grade aluminum construction
- CSA Type 3R rated
- 240V AC
- Pad-mount design
- Slanted roof with rain gutter
- Double-roof design for solar shielding
- Padlockable, stainless steel 3-point handle
- Single-sided, single-door design
- Hinged door with pour-in-place gasket
- Hidden hinges for additional security
- Gas shock door stay
- Full galvanized backpanel
- Service entrance rated main breaker with neutral block
- 1PH 3W, 120 / 240V MLO panel
- Lighting contactor, control wiring, and sealed photocell
- Convenience receptacle and HOA switch
- Heater and thermostat
- Deadfront wireways with louvers for added ventilation
- Powder coated PC101 Grey

Options

- Meter base and cable support mounted on exterior right side (add “-M” to end of part number)
- Door switch, light
- Ceiling-mounted cooling fan with controls

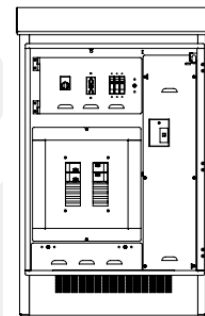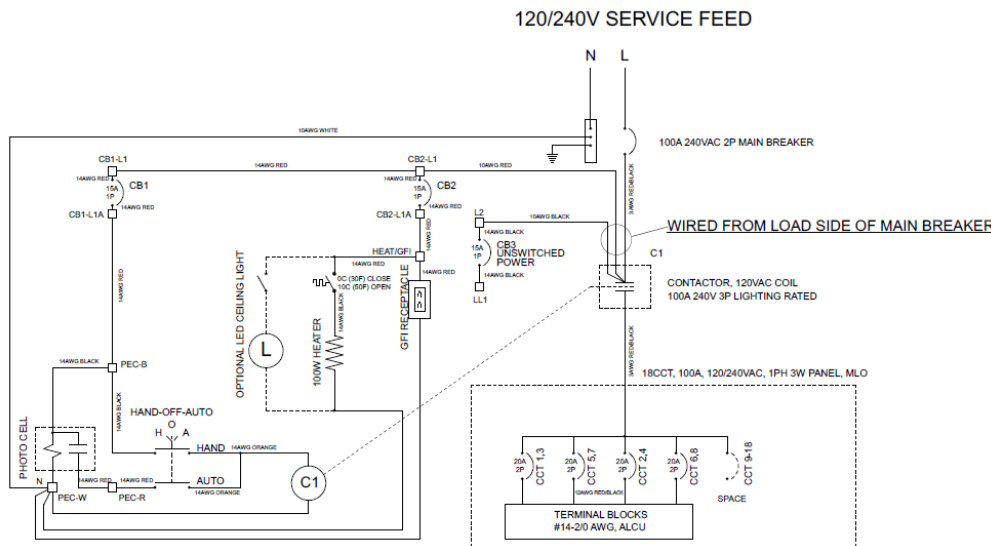

PART #	HEIGHT	WIDTH	DEPTH	MAIN SERVICE	MAIN BREAKER
EPL-1100	48 in	30 in	12 in	120/240V 100A 1PH 3W	100A
EPL-1175	48 in	30 in	12 in	120/240V 175A 1PH 3W	175A