



Advanced Technology. Simple Solutions.

# DIRECT BURIAL RV POWER PEDESTAL WITH WHILE-IN-USE COVER

## EVPF-D


The EVPF-D direct burial RV pedestal comes complete with feed-thru lugs, while-in-use cover, and receptacles protected by branch rated breakers. The galvanized steel body construction provides additional corrosion resistance. Standard PC113 Parks Green powder coat paint provides a durable finish. Multiple breaker, receptacle, and mounting configurations are available to suit a wide variety of applications. The Type 3R weatherproof design can be used in both indoor and outdoor applications.

### Features / Specifications

- Galvanized steel construction
- CSA Type 3R rated
- Pedestal is 24 in. high above grade
- Dimensions of 7 in. wide x 5 in. deep
- 24-in. direct burial spade
- Breaker located under while-in-use cover
- 10kAIR branch rated breaker protection
- Standard splitter blocks #14-2/0 AWG
- Ground lug

### Options

- Additional receptacle configurations
- Low voltage section with telephone or network outlets
- Higher amperage feed-thru lugs
- Custom powder coat colours
- Custom heights

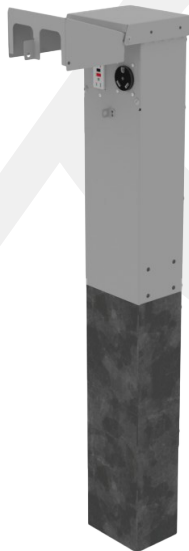

PART #	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
EVPF1-D	1	15A GFI DUPLEX	1	15A 1P
EVPF2-D	2	15A GFI DUPLEX	2	15A 1P
EVPF3-D	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
EVPF4-D	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
EVPF5-D	1	15A GFI DUPLEX	1	15A 1P
	1	50A 125/250V	1	50A 2P
EVPF6-D	1	20A GFI DUPLEX	1	20A 1P
EVPF7-D	2	20A GFI DUPLEX	2	20A 1P
EVPF8-D	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
EVPF9-D	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
EVPF10-D	1	20A GFI DUPLEX	1	20A 1P
	1	50A 125/250V	1	50A 2P
EVPF11-D	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
EVPF14-D	1	30A 125V CROWFOOT	1	30A 1P
EVPF16-D	1	50A 125/250V	1	50A 2P
EVPF17-D	2	30A 125V CROWFOOT	2	30A 1P
EVPF18-D	2	50A 125/250V	2	50A 2P



Advanced Technology. Simple Solutions.

## ADDITIONAL COMPONENT AND RECEPTACLE PART NUMBERS

### ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 3)

ADD TO PART NUMBER e.g. EVPF-AAJ-DL2

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
50A 125/250V TL	50A 2P	Q

### ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. EVPF3-DL2

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N