



Advanced Technology. Simple Solutions.

EVENT POWER TIE-IN

EPT



Built for the diversity of events, this generator tie-in enclosure is designed to provide a user-friendly connection point for cam-lock portable power equipment into a power system's main service entrance equipment. The weatherproof cabinet has a while-in-use design to maintain a 3R rating while the cables are connected.

Features / Specifications

- Marine-grade aluminum construction
- Type 3R rated
- Hinged door with pour-in-place gasket
- Pad-lockable, stainless steel 3-point handle
- Wall-mount or pad-mount design
- Sizes from 400A - 3000A
- 208V, 240V, 480V and 600V input
- Deadfront cover over lug connections
- Tin-plated copper or aluminum bussing
- Mechanical barrel lugs for permanent connections
- Colour-coded Camlock connectors or mechanical barrel lugs for temporary connections
- Hinged "trapdoor" for temporary conductors
- PC101 (ANSI 61) Grey powder coat finish

Options

- Carbon or stainless steel construction
- Multiple configurations of termination lugs
- Phase monitoring
- Overcurrent protection
- Key interlock provision
- Type 1, 4, 4X, or 12 enclosures
- Anti-graffiti coating
- Custom sizes, materials, and colours
- Contact Valid for all available options

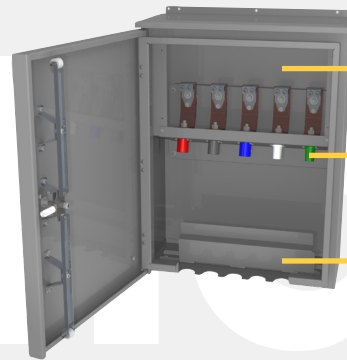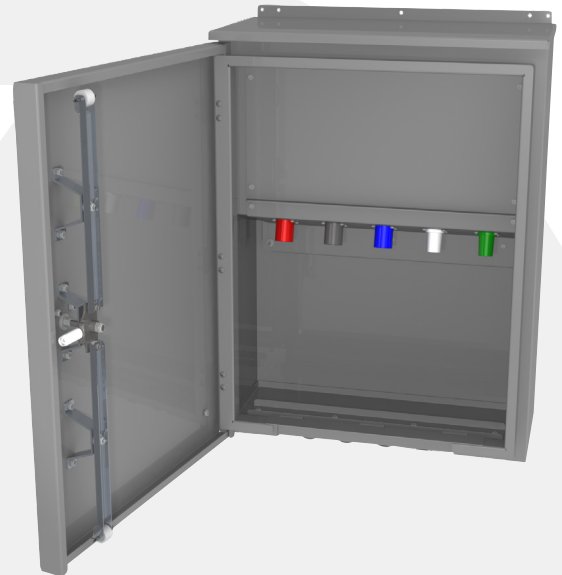

- Deadfront cover removed to show lug connections
- Colour-coded Camlock connectors
- Bottom cable hatch to protect installed cables while in use

Product Selection Guide Part Number:

1. PRODUCT		2. BUS RATING (AMPS)		3. SYSTEM VOLTAGE		4. # OF CONDUCTORS		5. INCOMING TERMINATIONS		6. MOUNTING STYLE	
GTE	EVENT POWER TIE-IN	XXX	BUS RATING IN AMPS	208	208V	3	3 WIRE	L	MECHANICAL LUGS	W	WALL-MOUNT
				240	240V	3G	3 WIRE + GROUND	F	FEMALE CAM-LOCKS	P	PAD-MOUNT
				480	480V	4	4 WIRE	M	MALE CAM-LOCKS		
				600	600v	4G	4 WIRE + GROUND				
SAMPLE PART NUMBER:											
GTE		400		600		4G		M		W	