



Advanced Technology. Simple Solutions.



HIGHWAY SERVICE DISCONNECT WITH METERING

HWYSDMC

This family of HWYSDMC service panels can be used on any steel pole for street lighting and power distribution and is fed from a supply authority for underground or overhead service. The integrated disconnect and meter base provides a complete service entrance solution in a single enclosure. The Type 3R environmental protection certification ensures proper equipment protection.

Features / Specifications


- 304 #4 stainless steel construction
- Service entrance rated
- CSA Type 3R rated
- Overhead or underground service applications
- Lock-out tab on main breaker
- Mounting hardware and conduit fittings included
- Meter viewing window in door
- Hinged door with padlockable handle
- 5/8-in. antenna hole in roof with oil-tight seal
- Dual padlock attachment
- Single or three phase service
- Utility specified meter bases
- Hot or cold metering
- 10kAIC rated

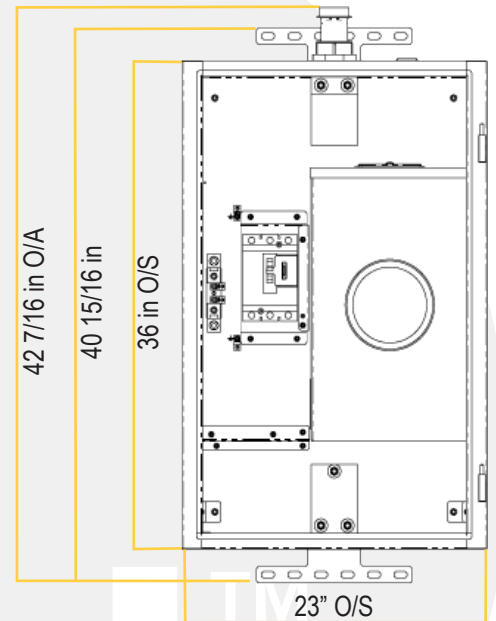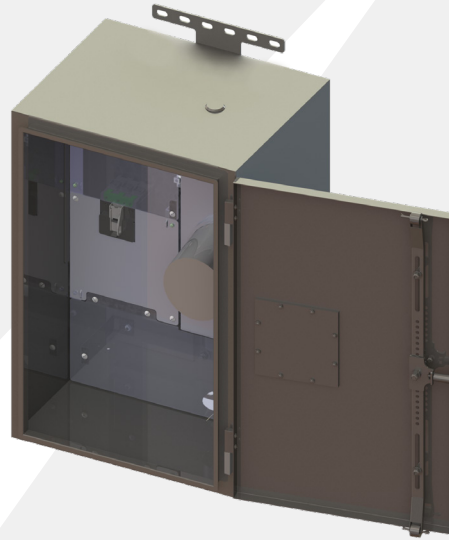

Front View
(door hidden, covers hidden)

Options

- Snowplow debris cover
- Aluminum construction
- Powder coat paint

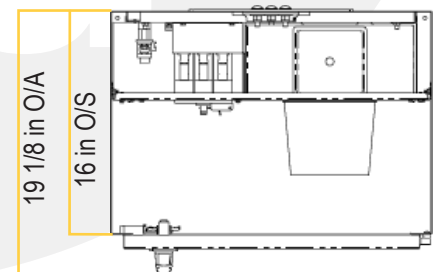

Top View
(top wrap hidden)

PART NUMBER	FEED	MAIN DISCONNECT	METER BASE	ORIENTATION
HWYSDMC100-240	OVERHEAD	240V 100A 1PH	BS2-TCVBC	HOT METERED
HWYSDMC150-240	OVERHEAD	240V 150A 1PH	BS2-TCVBC	HOT METERED
HWYSDMC200-240	OVERHEAD	240V 200A 1PH	BS2-TCVBC	HOT METERED
HWYSDMC100-600	OVERHEAD	600V 100A 3PH	PL17-TCV	COLD METERED
HWYSDMC150-600	OVERHEAD	600V 150A 3PH	PL27-TCV	COLD METERED
HWYSDMC200-600	OVERHEAD	600V 200A 3PH	PL27-TCV	COLD METERED
HWYSDMC100-240-U	UNDERGROUND	240V 100A 1PH	BS2-TCVBC	HOT METERED
HWYSDMC150-240-U	UNDERGROUND	240V 150A 1PH	BS2-TCVBC	HOT METERED
HWYSDMC200-240-U	UNDERGROUND	240V 200A 1PH	BS2-TCVBC	HOT METERED
HWYSDMC100-600-U	UNDERGROUND	600V 100A 3PH	PL17-TCV	COLD METERED
HWYSDMC150-600-U	UNDERGROUND	600V 150A 3PH	PL27-TCV	COLD METERED
HWYSDMC200-600-U	UNDERGROUND	600V 200A 3PH	PL27-TCV	COLD METERED