



Advanced Technology. Simple Solutions.

MDE DISCONNECT 175-400


Valid's high-quality distribution units are built for the rigor of the film and entertainment industry. Valid offers a variety of connectors based on local requirements across North America, all housed in a durable, versatile enclosure that is Type 3R rated.

Features / Specifications


- Stainless steel construction
- CSA Type 3R rated
- Serviceable hinges
- Pour-in-place gasket
- Colour-coded connectors for temporary connections
- Logo etching

Options

- Carbon steel or marine-grade aluminum construction
- Custom sizes
- Custom powder coating colours
- GFCI

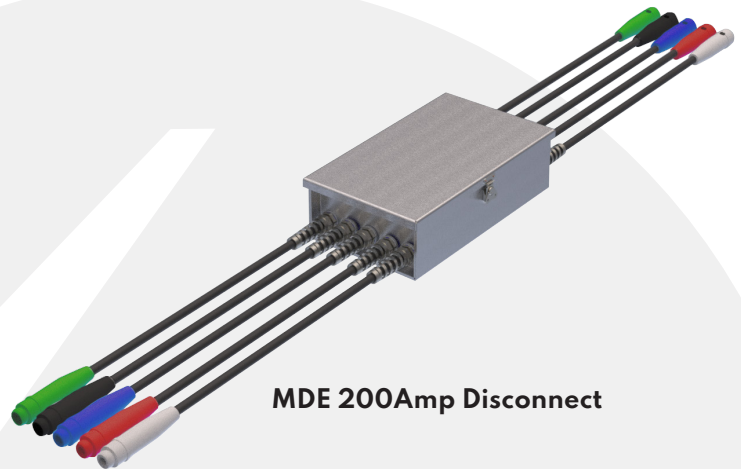

MDE 200Amp Disconnect

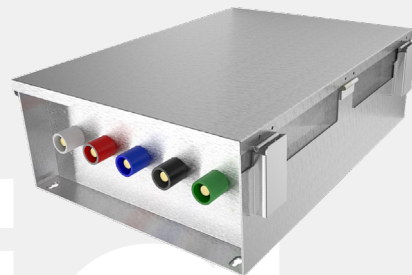

MDE 400Amp Disconnect

PART NUMBER	HEIGHT	WIDTH	DEPTH	MAIN BREAKER AMPERAGE
MDE - 175	8 in	25 in	18 in	250 amp
MDE - 200	5 in	17 in	10 in	250 amp
MDE - 250	6 in	18 in	9 in	250 amp
MDE - 400	8 in	25 in	18 in	400 amp

Contact Valid for all available options.