



Advanced Technology. Simple Solutions.

# TEMPORARY POWER PANEL - NON METERED

## PWC-05


This wall, pole, or plywood-mounted temporary power panel is the solution for temporary power requirements. This panel can service up to 8 individual loads as well as any additional loads that can be added through the open bottom. There are multiple receptacle configurations to enable the panel to fit any required applications. The padlockable flip-lid provides security for energized devices.

### Features / Specifications

- Galvanized steel construction
- External mounting ears for pole, wall, or plywood-mounting
- Padlockable flip-lid
- Up to 8 receptacles with weatherproof covers
- Up to 200A main breaker
- Open bottom for additional loads
- All wiring is enclosed in dedicated wireways
- Universal receptacle openings
- Can either be supplied empty and certified as Type 3R or supplied complete with panel and receptacles for complete certification.
- Powder coated PC101 Grey

### Optional Receptacles Complete With Weatherproof Covers

- 15A Duplex GFI
- 20A Duplex GFI
- 15A Duplex
- 20A Duplex
- 15A TL 125V
- 20A TL 125V
- 30A Crowfoot 125V
- 30A TL 125V
- 30A 125/250V
- 50A 125/250V
- 50A TL 125/250V

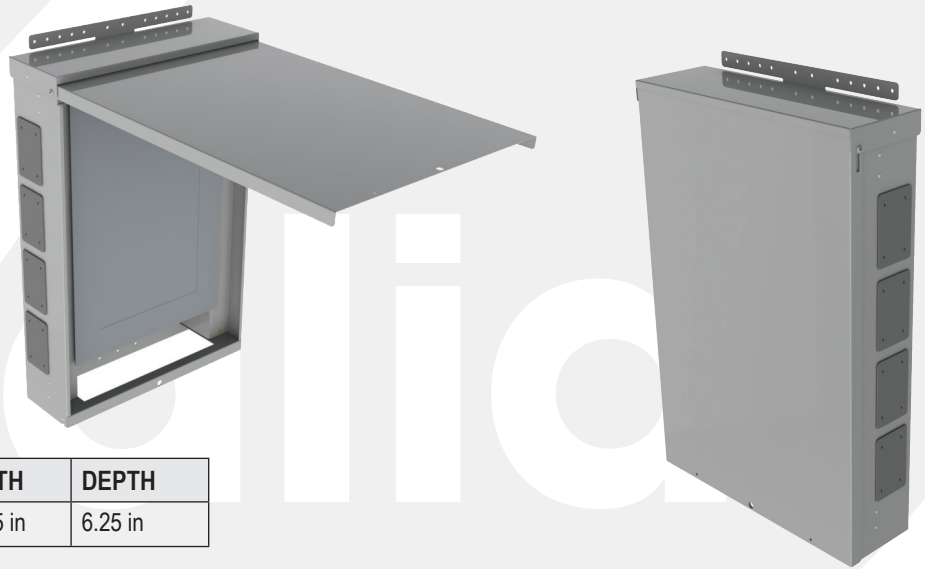

### Empty Enclosure

PART NUMBER	HEIGHT	WIDTH	DEPTH
PWC-05	30 in	19.25 in	6.25 in

### Enclosure with Panel

PART NUMBER	HEIGHT	WIDTH	DEPTH	MAIN SERVICE	MAIN BREAKER	PANEL CCTS
PWC-05-60	30 in	19.25 in	6.25 in	120/240V 1PH	60A 2P	16
PWC-05-100	30 in	19.25 in	6.25 in	120/240V 1PH	100A 2P	16
PWC-05-125	30 in	19.25 in	6.25 in	120/240V 1PH	125A 2P	24
PWC-05-200	30 in	19.25 in	6.25 in	120/240V 1PH	200A 2P	24