



Advanced Technology. Simple Solutions.

DIRECT BURIAL CAMPGROUND PEDESTAL

RVB

This pedestal style is a direct burial design, providing the RV owner with a single power point. All receptacles are protected by breakers on the pedestal.


Features / Specifications

- Galvanized steel construction
- Dimensions of 34 in (H) x 7 in (W) x 5 ¼ in (D)
- CSA Type 3R rated
- Powder coated PC113 Parks Green
- 24-in direct burial spade
- Aluminum cap for additional corrosion protection
- Standard splitter blocks #14-2/0
- While-in-use padlock cover

Options

- Top light
- Side light
- Photocell
- Water spigot(s)
- Additional receptacle configurations
- Low-voltage section with cable, telephone, or network outlets
- Higher amperage feed-thru lugs
- Custom powder coat colours including beige, grey, and white

PART #	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
RVB1	1	15A GFI DUPLEX	1	15A 1P
RVB2	2	15A GFI DUPLEX	2	15A 1P
RVB3	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVB4	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVB5	1	15A GFI DUPLEX	1	15A 1P
	1	50A 125/250V	1	50A 2P
RVB6	1	20A GFI DUPLEX	1	20A 1P
RVB7	2	20A GFI DUPLEX	2	20A 1P
RVB8	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVB9	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVB10	1	20A GFI DUPLEX	1	20A 1P
	1	50A 125/250V	1	50A 2P
RVB11	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVB14	1	30A 125V CROWFOOT	1	30A 1P
RVB16	1	50A 125/250V	1	50A 2P
RVB17	2	30A 125V CROWFOOT	2	30A 1P
RVB18	2	50A 125/250V	2	50A 2P

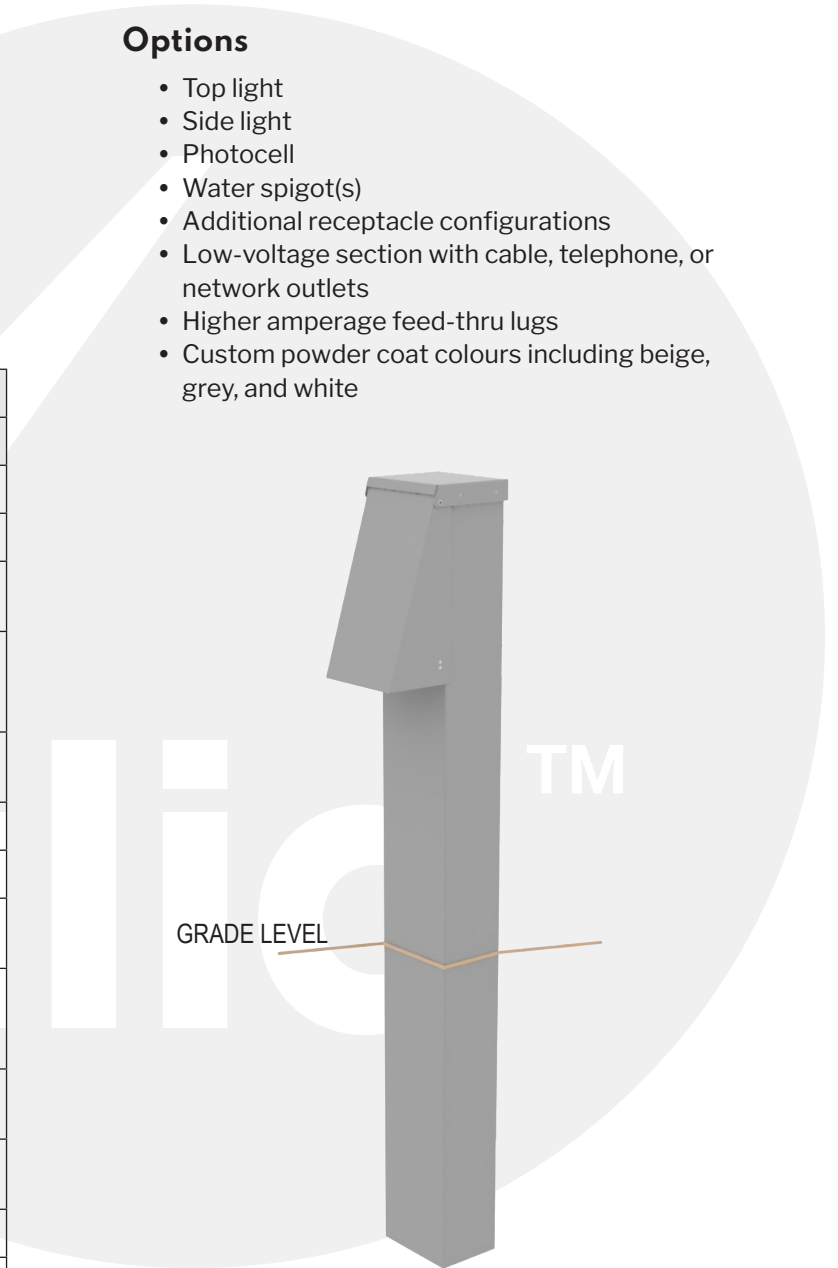

Additional part numbers and configurations on next page.



Advanced Technology. Simple Solutions.

DIRECT BURIAL CAMPGROUND PEDESTAL

RVB

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 4)


ADD TO PART NUMBER e.g. RVB-AAM-PSV

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
50A 125/250V TL	50A 2P	Q

ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVB4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
SINGLE WATER SPIGOT	W1
DOUBLE WATER SPIGOT	W2

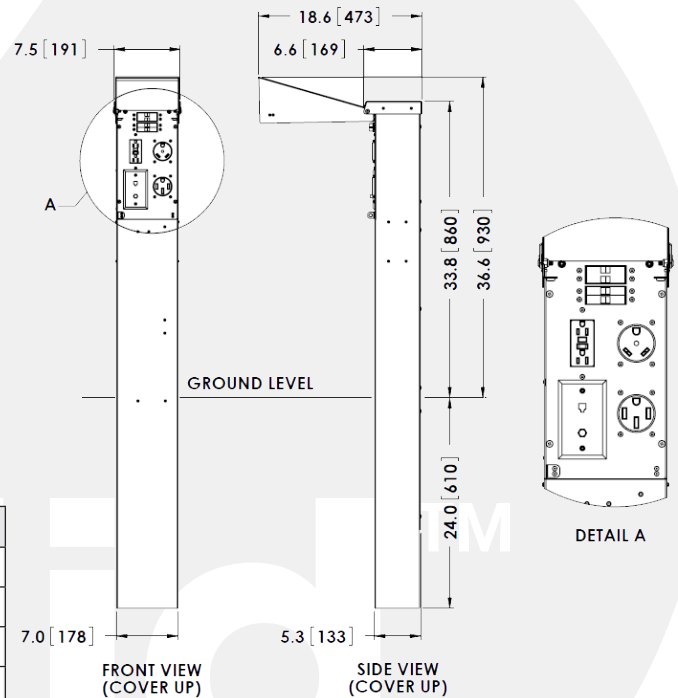

TYPICAL RVB4-CV CONFIGURATION