
DIRECT BURIAL CAMPGROUND PEDESTAL

RVB

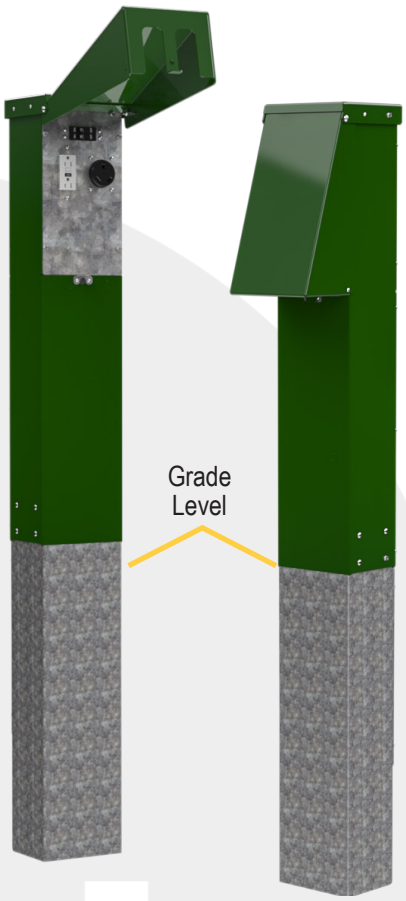

This pedestal style is a direct burial design and provides the RV owner with a single power point. All receptacles are protected by breakers on the pedestal.

Features / Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- 24 inch direct burial spade
- Dimensions of 34 in (H) x 7 in (W) x 5 ¼ in (D)
- While-in-use padlock cover
- Standard splitter blocks are loop feed #14-2/00
- 10kAIR branch rated breaker protection
- Powder coat finish: PC113 Parks Green

Options

- Higher amperage feed-thru lugs
- Additional receptacle configurations
- Top light
- Side light
- Photocell
- Low-voltage section with cable, telephone, or network outlets
- Water spigot(s)
- Custom powder coat colours including beige, grey, and white

	RECEPTACLES		BREAKERS	
PART #	QTY	TYPE	QTY	TYPE
RVB1	1	15A GFI DUPLEX	1	15A 1P
RVB2	2	15A GFI DUPLEX	2	15A 1P
RVB3	1 1	15A GFI DUPLEX 30A 125V CROWFOOT	1 1	15A 1P 30A 1P
RVB4	1 1 1	15A GFI DUPLEX 30A 125V CROWFOOT 50A 125/250V	1 1 1	15A 1P 30A 1P 50A 2P
RVB5	1 1	15A GFI DUPLEX 50A 125/250V	1 1	15A 1P 50A 2P
RVB6	1	20A GFI DUPLEX	1	20A 1P
RVB7	2	20A GFI DUPLEX	2	20A 1P
RVB8	1 1	20A GFI DUPLEX 30A 125V CROWFOOT	1 1	20A 1P 30A 1P

	RECEPTACLES		BREAKERS	
PART #	QTY	TYPE	QTY	TYPE
RVB9	1 1 1	20A GFI DUPLEX 30A 125V CROWFOOT 50A 125/250V	1 1 1	20A 1P 30A 1P 50A 2P
RVB10	1 1	20A GFI DUPLEX 50A 125/250V	1 1	20A 1P 50A 2P
RVB11	1 1	30A 125V CROWFOOT 50A 125/250V	1 1	30A 1P 50A 2P
RVB14	1	30A 125V CROWFOOT	1	30A 1P
RVB16	1	50A 125/250V	1	50A 2P
RVB17	2	30A 125V CROWFOOT	2	30A 1P
RVB18	2	50A 125/250V	2	50A 2P

Additional part numbers and configurations on next page.

1-888-632-6477 | sales@validmfg.com | **validmfg.com**

DIRECT BURIAL CAMPGROUND PEDESTAL

RVB

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 4)


ADD TO PART NUMBER e.g. RVB-AAM-PSV


RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
30A TL 250V	30A 2P	L
50A 125/250V	50A 2P	M
30A 250V	30A 2P	N
50A 250V	50A 2P	O
30A TL 125/250V	30A 2P	P
50A 125/250V TL	50A 2P	Q

ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVB4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
SINGLE WATER SPIGOT	W1
DOUBLE WATER SPIGOT	W2

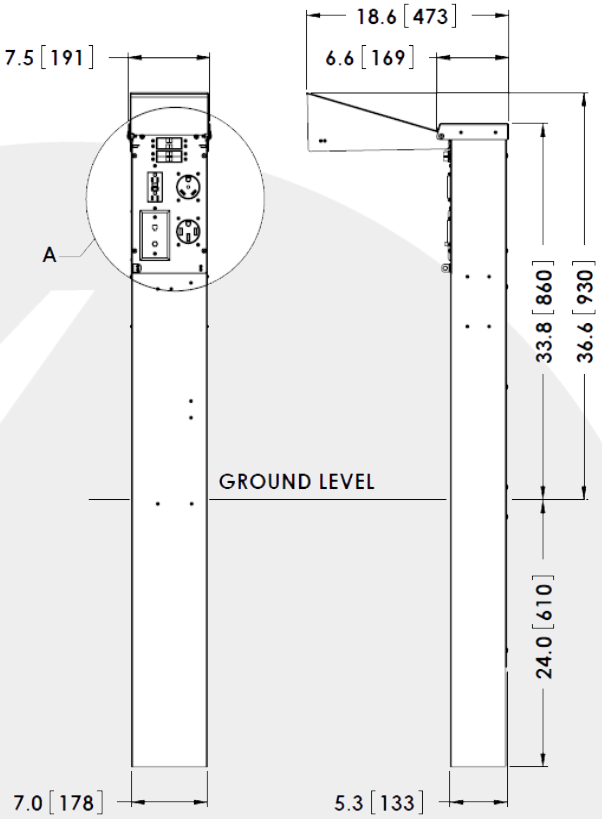

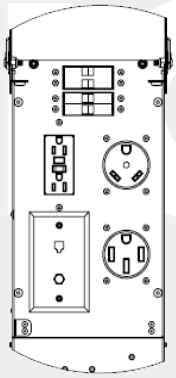

TYPICAL RVB4-CV CONFIGURATION

1-888-632-6477 | sales@validmfg.com | **validmfg.com**