




Advanced Technology. Simple Solutions.

BACK TO BACK DIRECT BURIAL CAMPGROUND PEDESTAL

RVBD

This pedestal style is a direct burial back-to-back design providing RV owners in adjacent campsites with a single power point. All receptacles are protected by breakers on this pedestal.

PART #	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
RVBD1	2	15A GFI DUPLEX	2	15A 1P
RVBD2	4	15A GFI DUPLEX	4	15A 1P
RVBD3	2	15A GFI DUPLEX	2	15A 1P
	2	30A 125V CROWFOOT	2	30A 1P
RVBD4	2	15A GFI DUPLEX	2	15A 1P
	2	30A 125V CROWFOOT	2	30A 1P
	2	50A 125/250V	2	50A 2P
RVBD5	2	15A GFI DUPLEX	2	15A 1P
	2	50A 125/250V	2	50A 2P
RVBD6	2	20A GFI DUPLEX	2	20A 1P
RVBD7	4	20A GFI DUPLEX	4	20A 1P
RVBD8	2	20A GFI DUPLEX	2	20A 1P
	2	30A 125V CROWFOOT	2	30A 1P
RVBD9	2	20A GFI DUPLEX	2	20A 1P
	2	30A 125V CROWFOOT	2	30A 1P
	2	50A 125/250V	2	50A 2P
RVBD10	2	20A GFI DUPLEX	2	20A 1P
	2	50A 125/250V	2	50A 2P
RVBD11	2	30A 125V CROWFOOT	2	30A 1P
	2	50A 125/250V	2	50A 2P
RVBD14	2	30A 125V CROWFOOT	2	30A 1P
RVBD16	2	50A 125/250V	2	50A 2P
RVBD17	4	30A 125V CROWFOOT	4	30A 1P
RVBD18	4	50A 125/250V	4	50A 2P

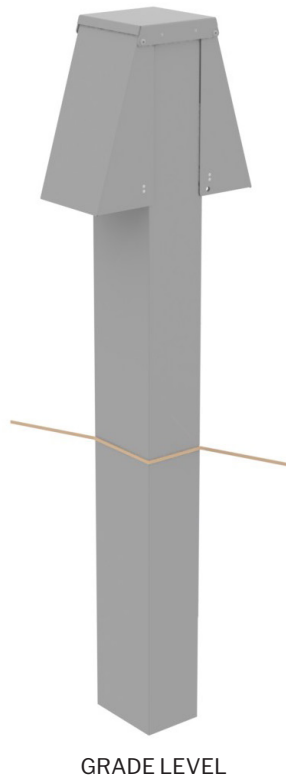

Features/Specifications

- Galvanized steel construction
- Dimensions of 34"H (above grade) x 7"W x 5¼" D
- 24" direct burial spade
- CSA Type 3R rated
- Powder coated PC113 Parks Green
- Back-to-back receptacle and breaker design
- Aluminum cap for additional corrosion protection
- Loop feed power termination lugs
- 10kAIR branch rated breaker protection
- While-in-Use padlock cover
- Standard splitter blocks #14-2/0

Optional Items

- Top light
- Side light
- Photocell
- Water Spigot(s)
- Additional receptacle configurations
- Low voltage section with cable telephone or network outlets
- Remote metering systems
- Higher amperage feedthru lugs
- Custom powder coat colours including beige, grey and white

ADDITIONAL PART NUMBERS AND CONFIGURATIONS ON NEXT PAGE

Rev 1.1




Advanced Technology. Simple Solutions.

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 8) ADD TO PART NUMBER e.g. RVBD-AAMM-PSV

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
50A 125/250V TL	50A 2P	Q

ADDITIONAL COMPONENTS ADD TO PART NUMBER e.g. RVBD4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
SINGLE WATER SPIGOT	W1
DOUBLE WATER SPIGOT	W2

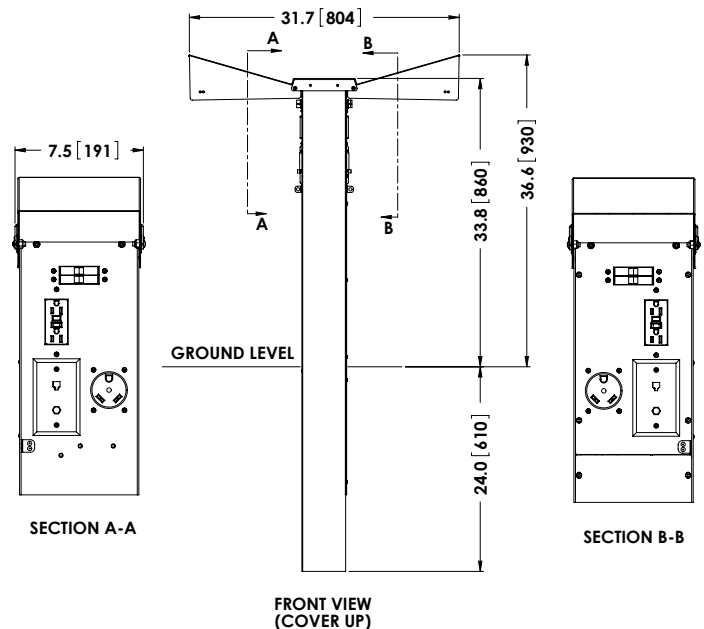

TYPICAL RVBD3-CV CONFIGURATION

Rev 1.1