



Advanced Technology. Simple Solutions.

METERED DIRECT-BURIAL CAMPGROUND PEDESTAL

RVBM


This pedestal style is a direct-burial design providing the RV owner with a single power point. All receptacles are protected by breakers on the pedestal and the check meter allows monitoring of power consumption.

Features / Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- Loop feed power termination lugs
- 10kAIR branch rated breaker protection
- While-in-use padlock cover
- PC113 Parks Green powder coat finish
- 34 in (H) x 7 in (W) x 5.25 in (D) galvanized steel construction
- 24-in direct burial spade
- Standard splitter blocks #14-2/0

Options

- Top light or side light
- Photocell
- Additional receptacle configurations
- Low-voltage section with cable telephone or network outlets
- Remote metering systems
- Higher amperage feed-thru lugs
- Custom powder coat colours including beige, grey and white

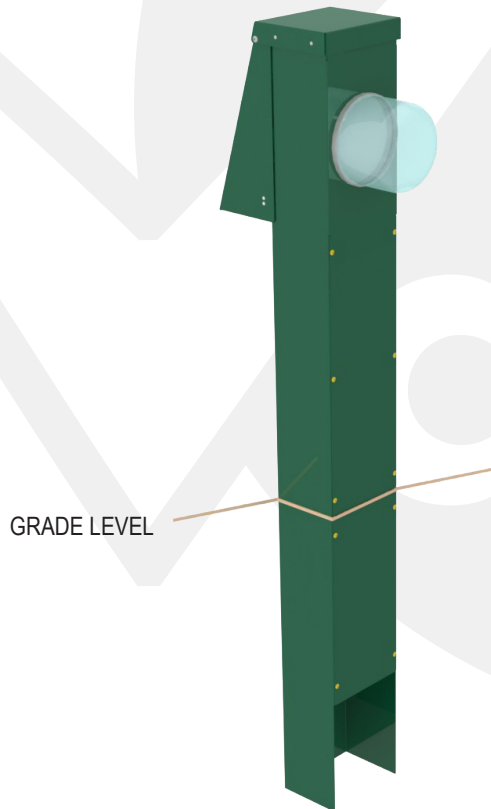

PART #	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
RVBM1	1	15A GFI DUPLEX	1	15A 1P
RVBM2	2	15A GFI DUPLEX	2	15A 1P
RVBM3	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVBM4	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVBM5	1	15A GFI DUPLEX	1	15A 1P
	1	50A 125/250V	1	50A 2P
RVBM6	1	20A GFI DUPLEX	1	20A 1P
RVBM7	2	20A GFI DUPLEX	2	20A 1P
RVBM8	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVBM9	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVBM10	1	20A GFI DUPLEX	1	20A 1P
	1	50A 125/250V	1	50A 2P
RVBM11	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVBM14	1	30A 125V CROWFOOT	1	30A 1P
RVBM16	1	50A 125/250V	1	50A 2P
RVBM17	2	30A 125V CROWFOOT	2	30A 1P
RVBM18	2	50A 125/250V	2	50A 2P

Additional part numbers and configurations on next page.



Advanced Technology. Simple Solutions.

METERED DIRECT-BURIAL CAMPGROUND PEDESTAL

RVBM

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 4)

ADD TO PART NUMBER e.g. RVBM-AAM-PSV

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
50A 125/250V TL	50A 2P	Q

ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVBM4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P

