



Advanced Technology. Simple Solutions.

# PAD-MOUNT CAMPGROUND PEDESTAL

## RVP


This pedestal style is a pad-mount design providing the RV owner with a single power point. All receptacles are protected by breakers on the pedestal.

### Features / Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- Loop feed power termination lugs
- 10kAIR branch-rated breaker protection
- While-in-use padlock cover
- PC113 Parks Green powder coat finish
- 34 in. H x 7 in. W x 5.25 in. D galvanized steel construction
- 10-in. x 10-in. base plate
- Standard splitter blocks #14-2/0

### Options

- Template and 4 anchor bolts, nuts, and washers (P/N: PAB-RVP)
- Water spigot(s)
- Top light
- Side light
- Photocell
- Low-voltage section with cable, telephone, or network outlets
- Custom lug configurations

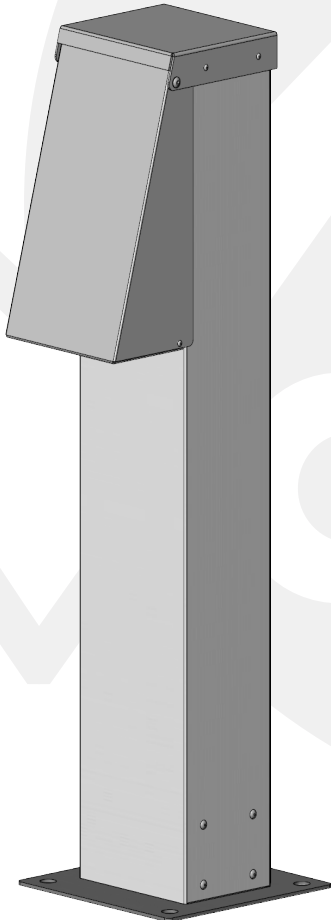

PART #	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
RVP1	1	15A GFI DUPLEX	1	15A 1P
RVP2	2	15A GFI DUPLEX	2	15A 1P
RVP3	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVP4	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVP5	1	15A GFI DUPLEX	1	15A 1P
	1	50A 125/250V	1	50A 2P
RVP6	1	20A GFI DUPLEX	1	20A 1P
RVP7	2	20A GFI DUPLEX	2	20A 1P
RVP8	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVP9	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVP10	1	20A GFI DUPLEX	1	20A 1P
	1	50A 125/250V	1	50A 2P
RVP11	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVP14	1	30A 125V CROWFOOT	1	30A 1P
RVP16	1	50A 125/250V	1	50A 2P
RVP17	2	30A 125V CROWFOOT	2	30A 1P
RVP18	2	50A 125/250V	2	50A 2P

Additional part numbers and configurations on the next page.



Advanced Technology. Simple Solutions.

# PAD-MOUNT CAMPGROUND PEDESTAL

RVP

## ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 4)


ADD TO PART NUMBER e.g. RVP-AAM-PSV

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
50A 125/250V TL	50A 2P	Q

## ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVP4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
SINGLE WATER SPIGOT	W1
DOUBLE WATER SPIGOT	W2

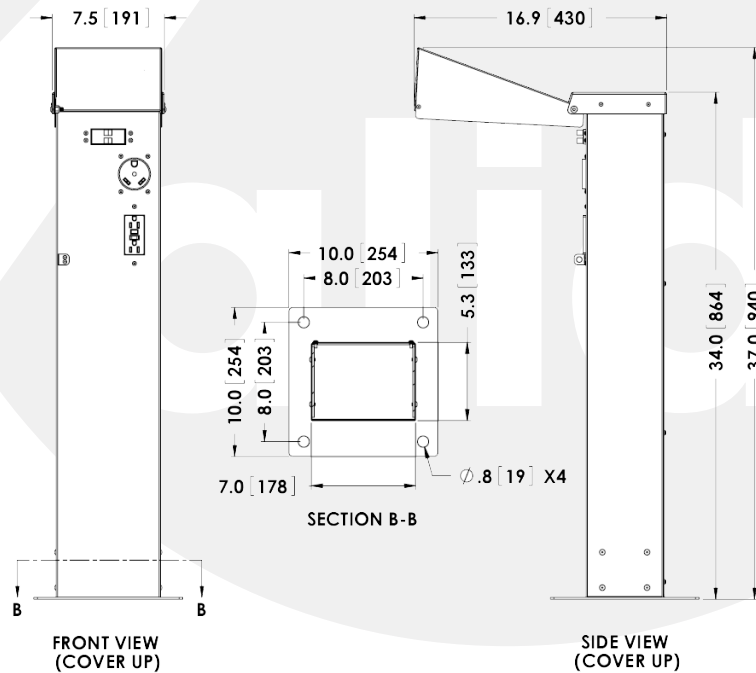

TYPICAL RVP3 CONFIGURATION