Advanced Technology. Simple Solutions.

BACK-TO-BACK PAD-MOUNT CAMPGROUND PEDESTAL

RVPD

This pedestal style is a pad-mount back-to-back design providing RV owners in adjacent campsites with a single power point. All receptacles are protected by breakers on this family of pedestals.

Features / Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- 10-in. x 10-in. base plate
- Back-to-back receptacle and breaker design
- 34 in. H x 7 in. W x 5.25 in. D galvanized steel construction
- While-in-use padlock cover
- Standard splitter blocks are loop feed #14-2/0
- 10kAIR branch rated breaker protection
- Powder coat finish: PC113 Parks Green



Options

- Template and 4 anchor bolts, nuts, and washers (P/N: PAB-RVP)
- Custom lug configurations
- Top light
- Side light
- Photocell
- Low voltage section with cable telephone or network outlets
- Remote metering systems
- Custom powder coat colours including beige, grey, and white

	RECEPTACLES		BREAKERS	
PART #	QTY	TYPE	QTY	TYPE
RVPD1	2	15A GFI DUPLEX	2	15A 1P
RVPD2	4	15A GFI DUPLEX	4	15A 1P
RVPD3	2 2	15A GFI DUPLEX 30A 125V CROWFOOT	2 2	15A 1P 30A 1P
RVPD4	2 2 2	15A GFI DUPLEX 30A 125V CROWFOOT 50A 125/250V	2 2 2	15A 1 30A 1P 50A 2P
RVPD5	2 2	15A GFI DUPLEX 50A 125/250V	2 2	15A 1P 50A 2P
RVPD6	2	20A GFI DUPLEX	2	20A 1P
RVPD7	4	20A GFI DUPLEX	4	20A 1P
RVPD8	2 2	20A GFI DUPLEX 30A 125V CROWFOOT	2 2	20A 1P 30A 1P
RVPD9	2 2 2	20A GFI DUPLEX 30A 125V CROWFOOT 50A 125/250V	2 2 2	20A 1P 30A 1P 50A 2P
RVPD10	2 2	20A GFI DUPLEX 50A 125/250V	2 2	20A 1P 50A 2P
RVPD11	2 2	30A 125V CROWFOOT 50A 125/250V	2 2	30A 1P 50A 2P
RVPD14	2	30A 125V CROWFOOT	2	30A 1P
RVPD16	2	50A 125/250V	2	50A 2P
RVPD17	4	30A 125V CROWFOOT	4	30A 1P
RVPD18	4	50A 125/250V	4	50A 2P

Additional part numbers and configurations on the next page.

Advanced Technology. Simple Solutions.

BACK-TO-BACK PAD-MOUNT CAMPGROUND PEDESTAL

RVPD

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 8)


ADD TO PART NUMBER e.g. RVPD-AAMM-PSV

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
50A TL 125V	50A 1P	R
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
30A TL 125/250V	30A 2P	P
50A 125/250V TL	50A 2P	Q

ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVPD4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
METERING SYSTEM	M
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
SINGLE WATER SPIGOT	W1

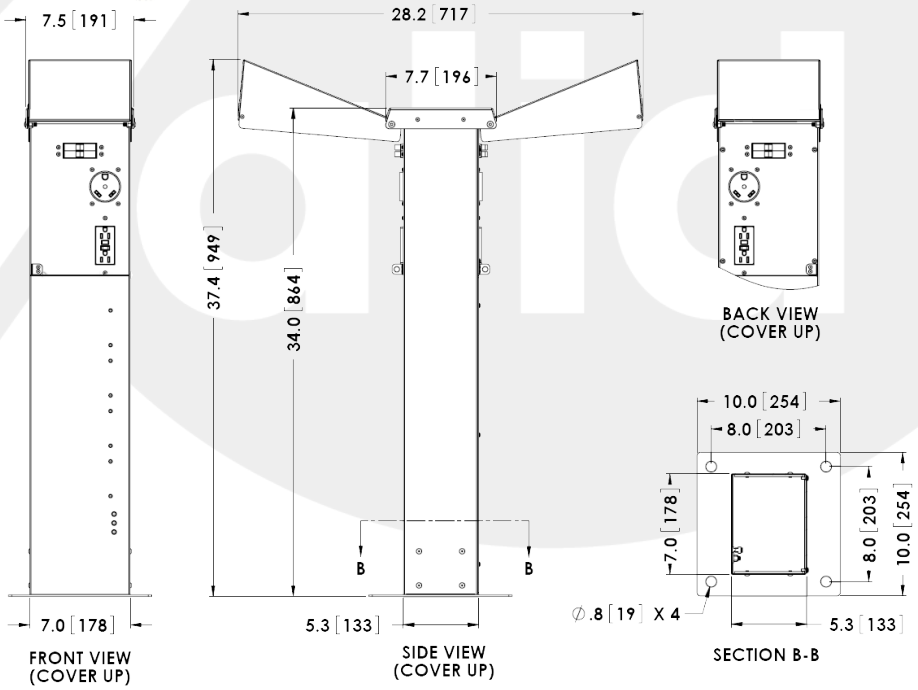

TYPICAL RVPD3 CONFIGURATION

1-888-632-6477 | sales@validmfg.com | **validmfg.com**