SHORT SERIES RV PEDESTAL WITH FLIP-LID

RVS

This is the short version of our popular family of RV pedestals. It is a pad-mount style providing the RV owner with a single power point and the convenience of a padlockable flip-lid design.

Features / Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- 18 in (H) x 7 in (W) x 5.25 in (D) galvanized steel construction
- While-in-use padlock cover
- 10kAIR branch rated breaker protection
- Powder coat finish: PC113 Parks Green



Options

- Template and 4 anchor bolts, nuts, and washers (P/N: PAB-RVS)
- Top light
- Side light
- Photocell
- Custom powder coat colours

	RECEPTACLES		BREAKERS	
PART #	QTY	TYPE	QTY	TYPE
RVS1	1	15A GFI DUPLEX	1	15A 1P
RVS2	2	15A GFI DUPLEX	2	15A 1P
RVS3	1 1	15A GFI DUPLEX 30A 125V CROWFOOT	1 1	15A 1P 30A 1P
RVS5	1 1	15A GFI DUPLEX 50A 125/250V	1 1	15A 1P 50A 2P
RVS6	1	20A GFI DUPLEX	1	20A 1P
RVS7	2	20A GFI DUPLEX	2	20A 1P
RVS8	1 1	20A GFI DUPLEX 30A 125V CROWFOOT	1 1	20A 1P 30A 1P
RVS10	1 1	20A GFI DUPLEX 50A 125/250V	1 1	20A 1P 50A 2P
RVS11	1 1	30A 125V CROWFOOT 50A 125/250V	1 1	30A 1P 50A 2P
RVS14	1	30A 125V CROWFOOT	1	30A 1P
RVS16	1	50A 125/250V	1	50A 2P
RVS17	2	30A 125V CROWFOOT	2	30A 1P
RVS18	2	50A 125/250V	2	50A 2P

Additional part numbers and configurations on the next page.

1-888-632-6477 | sales@validmfg.com | **validmfg.com**

SHORT SERIES RV PEDESTAL WITH FLIP-LID

RVS

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 2)


ADD TO PART NUMBER e.g. RVS-BHM

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
30A TL 250V	30A 2P	L
50A 125/250V	50A 2P	M
30A 250V	30A 2P	N
50A 250V	50A 2P	O
30A TL 125/250V	30A 2P	P
50A 125/250V TL	50A 2P	Q
50A TL 125V	50A 1P	R

ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVS3-PT

OPTIONS	ADDER
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
CUSTOM LUGS (UP TO 250 MCM FEED THROUGH)	L2

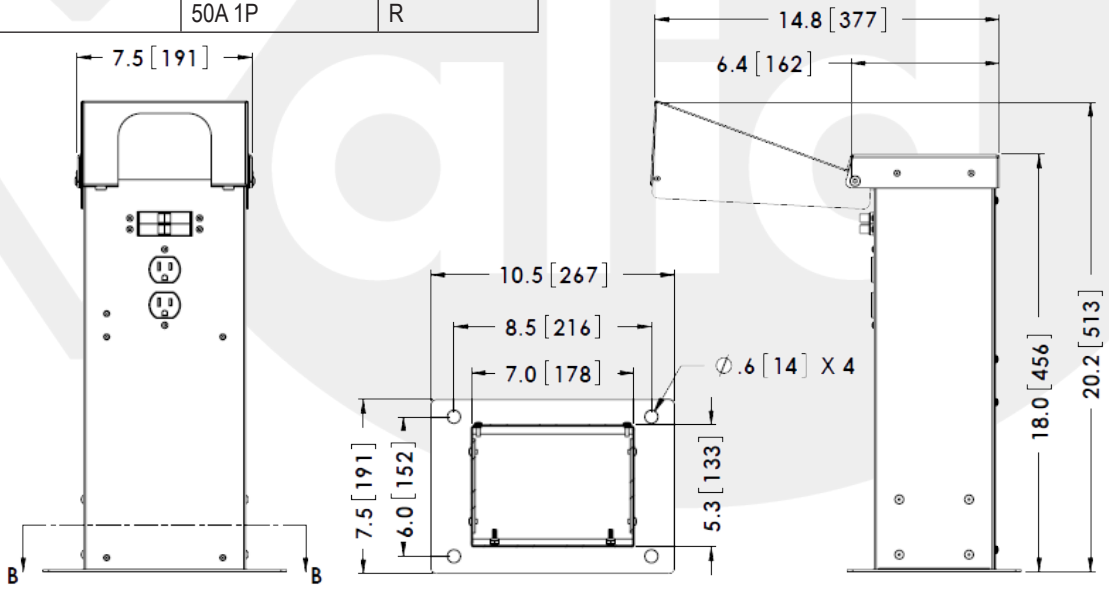

RVS Configuration with Optional Features

1-888-632-6477 | sales@validmfg.com | **validmfg.com**