



Advanced Technology. Simple Solutions.

MAIN LUG PANELBOARD ASSEMBLY - TYPE 4X

SLB4X


This panelboard assembly is specifically designed to house the Schneider® NQ main lug panelboard for use in locations requiring waterproof and corrosion protection. The panelboard is housed in the enclosure with the trim included inside the sealed outer door.

Features / Specifications

- CSA Type 4X rated
- Stainless steel construction
- Quarter-turn fastener(s) on door
- Gasketed hinged outer door with padlock attachment
- Comes with Schneider® NQ main lug panelboards
- Bottom feed

Options

- Branch breakers as required
- Drains and breathers
- Custom powder coat colours
- Top feed

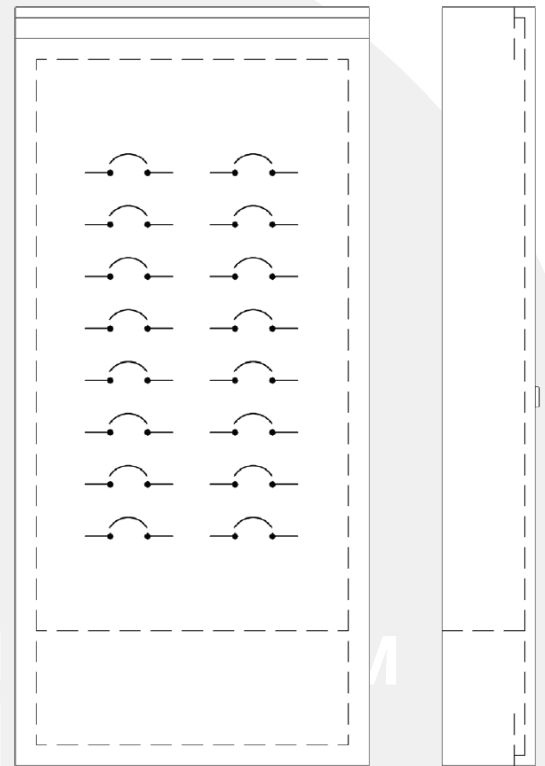

PART NUMBER	CIRCUITS	AMP	PHASE	WIRE	DIMENSIONS		
					H	W	D
SLB4X-100-18-1	18	100	1	3	28 in	24 in	6.5 in
SLB4X-100-30-1	30	100	1	3	34 in	24 in	6.5 in
SLB4X-225-30-1	30	225	1	3	34 in	24 in	6.5 in
SLB4X-225-42-1	42	225	1	3	40 in	24 in	6.5 in
SLB4X-225-72-1	72	225	1	3	46 in	24 in	6.5 in
SLB4X-225-84-1	84	225	1	3	52 in	24 in	6.5 in
SLB4X-400-30-1	30	400	1	3	52 in	24 in	6.5 in
SLB4X-400-42-1	42	400	1	3	52 in	24 in	6.5 in
SLB4X-400-84-1	84	400	1	3	70 in	24 in	6.5 in
SLB4X-100-18-3	18	100	3	4	28 in	24 in	6.5 in
SLB4X-100-30-3	30	100	3	4	34 in	24 in	6.5 in
SLB4X-225-30-3	30	225	3	4	34 in	24 in	6.5 in
SLB4X-225-42-3	42	225	3	4	40 in	24 in	6.5 in
SLB4X-225-72-3	72	225	3	4	46 in	24 in	6.5 in
SLB4X-225-84-3	84	225	3	4	52 in	24 in	6.5 in
SLB4X-400-30-3	30	400	3	4	52 in	24 in	6.5 in
SLB4X-400-42-3	42	400	3	4	52 in	24 in	6.5 in
SLB4X-400-72-3	72	400	3	4	64 in	24 in	6.5 in
SLB4X-400-84-3	84	400	3	4	70 in	24 in	6.5 in
SLB4X-600-30-3	30	600	3	4	64 in	24 in	6.5 in
SLB4X-600-42-3	42	600	3	4	64 in	24 in	6.5 in
SLB4X-600-84-3	84	600	3	4	82 in	24 in	6.5 in