



Advanced Technology. Simple Solutions.

# TEMPORARY POWER ENCLOSURE

## TPE

This temporary enclosure is designed to provide a user-friendly connection point for cam-lock portable power equipment into a power system's main service entrance equipment. The weatherproof cabinet has a while-in-use design to maintain a 3R rating while the cables are connected.


### Features / Specifications

- Marine-grade aluminum construction
- Type 3R rated
- Hinged door with pour-in-place gasket
- Pad-lockable, stainless steel 3-point handle
- Wall-mount or pad-mount design
- Sizes from 400A - 3000A
- 208V, 240V, 480V and 600V input
- Deadfront cover over lug connections
- Tin-plated copper or aluminum bussing
- Mechanical barrel lugs for permanent connections
- Colour-coded Camlock connectors or mechanical barrel lugs for temporary connections
- Hinged "trapdoor" for temporary conductors
- PC101 (ANSI 61) Grey powder coat finish



### Options

- Carbon or stainless steel construction
- Multiple configurations of termination lugs
- Phase monitoring
- Overcurrent protection
- Key interlock provision
- Type 1, 4, 4X, or 12 enclosures
- Anti-graffiti coating
- Custom sizes, materials, and colours
- Contact Valid for all available options

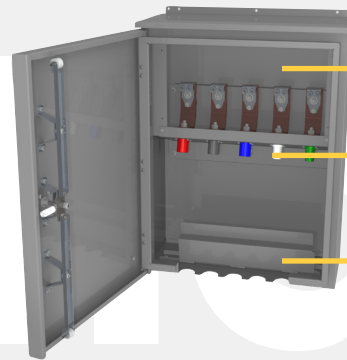

Deadfront cover removed to show lug connections

Colour-coded Camlock connectors

Bottom cable hatch to protect installed cables while in use

### Product Selection Guide Part Number:

| 1. PRODUCT                 |                           | 2. BUS RATING (AMPS) |                    | 3. SYSTEM VOLTAGE |      | 4. # OF CONDUCTORS |                 | 5. TERMINATIONS |                  | 6. MOUNTING STYLE |            |
|----------------------------|---------------------------|----------------------|--------------------|-------------------|------|--------------------|-----------------|-----------------|------------------|-------------------|------------|
| TPE                        | TEMPORARY POWER ENCLOSURE | XXX                  | BUS RATING IN AMPS | 208               | 208V | 3                  | 3 WIRE          | L               | MECHANICAL LUGS  | W                 | WALL-MOUNT |
|                            |                           |                      |                    | 240               | 240V | 3G                 | 3 WIRE + GROUND | F               | FEMALE CAM-LOCKS | P                 | PAD-MOUNT  |
|                            |                           |                      |                    | 480               | 480V | 4                  | 4 WIRE          |                 |                  |                   |            |
|                            |                           |                      |                    | 600               | 600v | 4G                 | 4 WIRE + GROUND |                 |                  |                   |            |
| <b>SAMPLE PART NUMBER:</b> |                           |                      |                    |                   |      |                    |                 |                 |                  |                   |            |
| TPE                        |                           | 400                  |                    | 600               |      | 4G                 |                 | F               |                  | W                 |            |