



Advanced Technology. Simple Solutions.


CONTINUOUS BUS SPLITTER TROUGH (3 BAR)

VBGXX-3X

These continuous bus splitter troughs are used for indoor or outdoor applications for power distribution. The bus bars are tin-plated aluminum and mounted on offset steps to enable simple cable termination. Bent edges and handholds on the screw-on-style lid allow easy field installation.

Features / Specifications

- Galvanized steel construction (Type 1 and 3R)
- Carbon steel construction (Type 4)
- Stainless steel construction (Type 4X)
- 600V, 3 bar
- Raised rear-mounting holes (Type 1 and 3R)
- External mounting ears (Type 4 and 4X)
- Screw-on covers with hand holds (Type 1 and 3R)
- Hinged door(s) with quarter-turn latches (Type 4 and 4X)
- 800A and above, minimum 50kA bus bracing
- 2000A and 2500A available in copper bussing only
- PC101 (ANSI 61) Grey powder coat finish (Type 1, 3R, and 4)
- Natural finish (Type 4X)
- Line and load lugs available
- Custom sizes, materials, and colours available

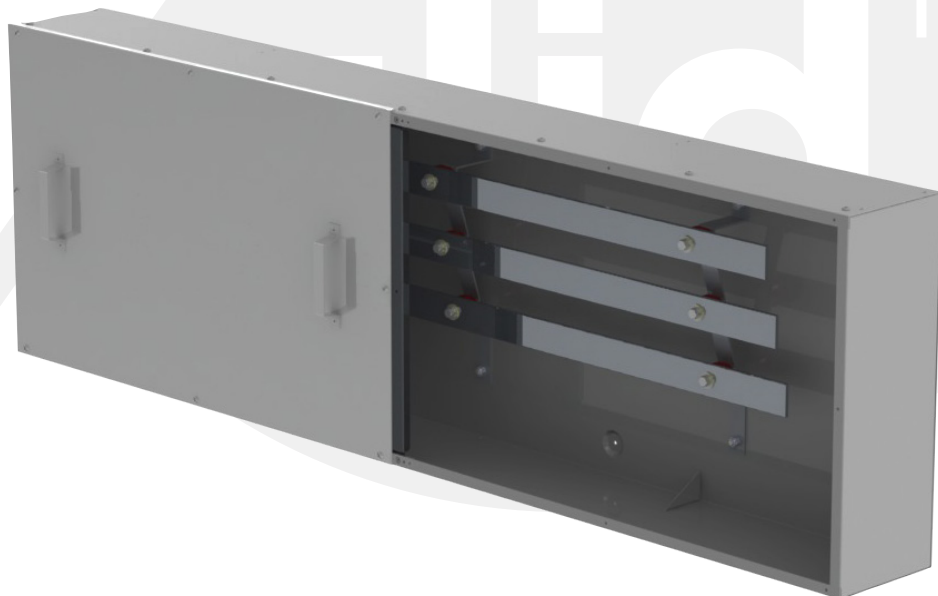

See next page for part numbers and specifications.



Advanced Technology. Simple Solutions.

CONTINUOUS BUS SPLITTER TROUGH (3 BAR)

VBGXX-3X

PART NUMBER (TYPE 1)	PART NUMBER (TYPE 3R)	PART NUMBER (TYPE 4)	PART NUMBER (TYPE 4X)	AMPS	HEIGHT	WIDTH	DEPTH
VBG1-3B-400-36	VBG3R-3B-400-36	VBG4-3B-400-36	VBG4X-3B-400-36	400	22 in	36 in	8 in
VBG1-3B-400-48	VBG3R-3B-400-48	VBG4-3B-400-48	VBG4X-3B-400-48	400	22 in	48 in	8 in
VBG1-3B-400-72	VBG3R-3B-400-72	VBG4-3B-400-72	VBG4X-3B-400-72	400	22 in	72 in	8 in
VBG1-3B-400-96	VBG3R-3B-400-96	VBG4-3B-400-96	VBG4X-3B-400-96	400	22 in	96 in	8 in
VBG1-3B-400-120	VBG3R-3B-400-120	VBG4-3B-400-120	VBG4X-3B-400-120	400	22 in	120 in	8 in
VBG1-3B-600-36	VBG3R-3B-600-36	VBG4-3B-600-36	VBG4X-3B-600-36	600	22 in	36 in	8 in
VBG1-3B-600-48	VBG3R-3B-600-48	VBG4-3B-600-48	VBG4X-3B-600-48	600	22 in	48 in	8 in
VBG1-3B-600-72	VBG3R-3B-600-72	VBG4-3B-600-72	VBG4X-3B-600-72	600	22 in	72 in	8 in
VBG1-3B-600-96	VBG3R-3B-600-96	VBG4-3B-600-96	VBG4X-3B-600-96	600	22 in	96 in	8 in
VBG1-3B-600-120	VBG3R-3B-600-120	VBG4-3B-600-120	VBG4X-3B-600-120	600	22 in	120 in	8 in
VBG1-3B-800-48	VBG3R-3B-800-48	VBG4-3B-800-48	VBG4X-3B-800-48	800	28 in	48 in	9 in
VBG1-3B-800-72	VBG3R-3B-800-72	VBG4-3B-800-72	VBG4X-3B-800-72	800	28 in	72 in	9 in
VBG1-3B-800-96	VBG3R-3B-800-96	VBG4-3B-800-96	VBG4X-3B-800-96	800	28 in	96 in	9 in
VBG1-3B-800-120	VBG3R-3B-800-120	VBG4-3B-800-120	VBG4X-3B-800-120	800	28 in	120 in	9 in
VBG1-3B-800-144	VBG3R-3B-800-144	VBG4-3B-800-144	VBG4X-3B-800-144	800	28 in	144 in	9 in
VBG1-3B-1000-72	VBG3R-3B-1000-72	VBG4-3B-1000-72	VBG4X-3B-1000-72	1000	28 in	72 in	9 in
VBG1-3B-1000-96	VBG3R-3B-1000-96	VBG4-3B-1000-96	VBG4X-3B-1000-96	1000	28 in	96 in	9 in
VBG1-3B-1000-120	VBG3R-3B-1000-120	VBG4-3B-1000-120	VBG4X-3B-1000-120	1000	28 in	120 in	9 in
VBG1-3B-1000-144	VBG3R-3B-1000-144	VBG4-3B-1000-144	VBG4X-3B-1000-144	1000	28 in	144 in	9 in
VBG1-3B-1200-72	VBG3R-3B-1200-72	VBG4-3B-1200-72	VBG4X-3B-1200-72	1200	28 in	72 in	9 in
VBG1-3B-1200-96	VBG3R-3B-1200-96	VBG4-3B-1200-96	VBG4X-3B-1200-96	1200	28 in	96 in	9 in
VBG1-3B-1200-120	VBG3R-3B-1200-120	VBG4-3B-1200-120	VBG4X-3B-1200-120	1200	28 in	120 in	9 in
VBG1-3B-1200-144	VBG3R-3B-1200-144	VBG4-3B-1200-144	VBG4X-3B-1200-144	1200	28 in	144 in	9 in
VBG1-3B-1600-72	VBG3R-3B-1600-72	VBG4-3B-1600-72	VBG4X-3B-1600-72	1600	34 in	72 in	12 in
VBG1-3B-1600-96	VBG3R-3B-1600-96	VBG4-3B-1600-96	VBG4X-3B-1600-96	1600	34 in	96 in	12 in
VBG1-3B-1600-120	VBG3R-3B-1600-120	VBG4-3B-1600-120	VBG4X-3B-1600-120	1600	34 in	120 in	12 in
VBG1-3B-1600-144	VBG3R-3B-1600-144	VBG4-3B-1600-144	VBG4X-3B-1600-144	1600	34 in	144 in	12 in
VBG1-3C-2000-144	VBG3R-3C-2000-144	VBG4-3C-2000-144	VBG4X-3C-2000-144	2000	34 in	144 in	12 in
VBG1-3C-2500-144	VBG3R-3C-2500-144	VBG4-3C-2500-144	VBG4X-3C-2500-144	2500	34 in	144 in	12 in