



Advanced Technology. Simple Solutions.

PARKING LOT CONTROLLER WITH ENERSAVE LOGIC AND SECONDARY 3-POLE CONTACTORS

VPC-DC


The VPC-DC parking lot controller uses Enersave logic to control multiple set points for parking lot applications. With a durable finish in standard PC101 Grey powder coat paint, its weatherproof design is ideal for outdoor use. This line of parking lot controllers is designed to control the contactors on the secondary of the distribution where the distribution panel is located in a separate location.

Features / Specifications

- Steel construction
- CSA Type 3R rated
- Padlockable draw latch(es)
- Enersave temperature controller with:
 - Up to 4 customer-programmable temperature set points (recommended -5°C , -10°C , -15°C , -20°C)
 - Duration of cycle
 - Supervisory enable signal
- Easy field configuration via jumper settings
- Standard 120/208V 3-phase
- HOA switch to bypass logic
- Temperature-sensing cable with weatherproof cover
- 60A, 3-pole contactors
- Wall-mounted enclosure
- PC101 Grey powder coat finish

Options

- Pad-mount design
- Higher amperage ratings
- Single phase (120/240V)
- Time-of-day clock
- Aluminum or stainless steel construction
- CSA type 1, 4, or 4X rated
- Remote-sensing thermostat
- Custom powder coat colours

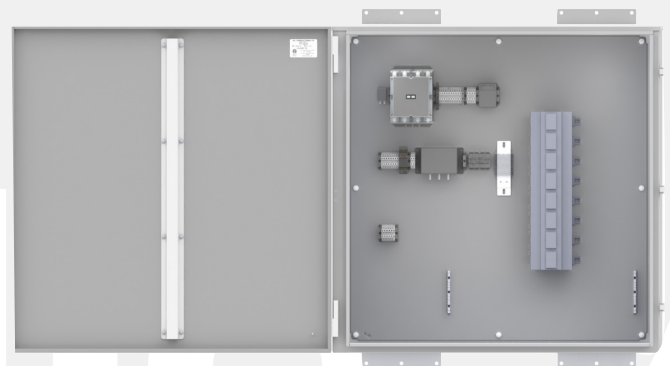

PART NUMBER	CIRCUITS
VPC-DC-60-9	9
VPC-DC-60-12	12
VPC-DC-60-18	18
VPC-DC-60-24	24
VPC-DC-60-30	30
VPC-DC-60-36	36
VPC-DC-60-42	42

