



Advanced Technology. Simple Solutions.

PARKING LOT CONTROLLER WITH ENERSAVE LOGIC, MAIN CONTACTORS, AND DUAL DISTRIBUTION PANELS

VPC-DD


The VPC-DD parking lot controller uses Enersave logic to control multiple set points for parking lot applications. This free-standing controller allows energy saving with 50/50 load sharing. With a durable finish in standard PC101 Grey powder coat paint, its weatherproof design is ideal for outdoor use.

Features / Specifications

- Steel construction
- CSA Type 3R rated
- Padlockable handle
- Enersave temperature controller with:
 - Up to 4 customer-programmable temperature set points (recommended -5°C, -10°C, -15°C, -20°C)
 - Duration of cycle
 - Supervisory enable signal
- Easy field configuration via jumper settings
- 50/50 load share
- Standard 120/208V 3-phase
- HOA switch to bypass logic
- Temperature-sensing cable with weatherproof cover
- 2 main contactors and 2 circuit breaker panels
- Pad-mount design
- PC101 Grey powder coat finish

Options

- Wall-mounted enclosure
- Higher amperage ratings
- Single phase (120/240V)
- Time-of-day clock
- Aluminum or stainless steel construction
- CSA type 1, 4, or 4X rated
- Remote-sensing thermostat
- Custom powder coat colours

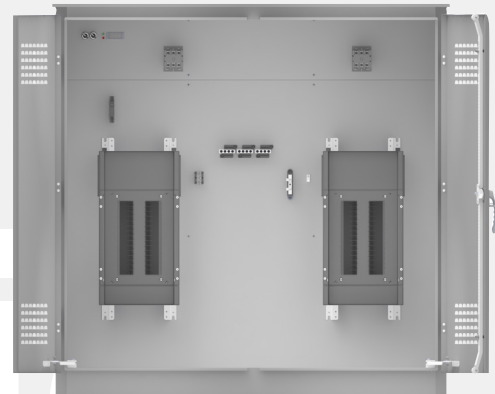

PART NUMBER	MAIN CONTACTORS	CIRCUITS (X 2)
VPC-DD-60-12	60A	12
VPC-DD-75-12	75A	12
VPC-DD-90-18	90A	18
VPC-DD-90-30	90A	30
VPC-DD-115-30	115A	30
VPC-DD-150-30	150A	30
VPC-DD-150-42	150A	42
VPC-DD-185-30	185A	30
VPC-DD-185-42	185A	42
VPC-DD-225-30	225A	30
VPC-DD-225-42	225A	42

