



Advanced Technology. Simple Solutions.

PARKING LOT UNIT SUB-CONTROLLER WITH TRANSFORMER, ENERSAVE LOGIC, MAIN CONTACTORS AND DUAL DISTRIBUTION PANELS

VPC-DF



The VPC-DF parking lot unit sub-controller uses Enersave logic to control multiple set points for parking lot applications. With a durable finish in standard PC101 Grey powder coat paint, its weatherproof design is ideal for outdoor use. The integrated transformer enables smaller cable sizes to be used for long cable runs. This free-standing controller allows energy saving with 50/50 load sharing.

Features / Specifications

- Steel construction
- CSA Type 3R rated
- Padlockable handle
- Enersave temperature controller with:
 - Up to 4 customer-programmable temperature set points (recommended -5°C, -10°C, -15°C, -20°C)
 - Duration of cycle
 - Supervisory enable signal
- Easy field configuration via jumper settings
- 50/50 load share
- Integral power transformer
- HOA switch to bypass logic
- Temperature-sensing cable with weatherproof cover
- 2 main contactors and 2 circuit breaker panels
- Pad-mount design
- PC101 Grey powder coat finish

Options

- Single phase secondary (120/240V)
- Higher amperage ratings
- Various voltage ratings
- Time-of-day clock
- Aluminum or stainless steel construction
- CSA type 1, 4, or 4X rated
- Remote-sensing thermostat
- Custom powder coat colours

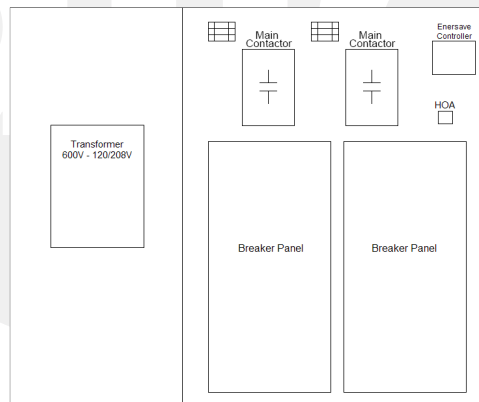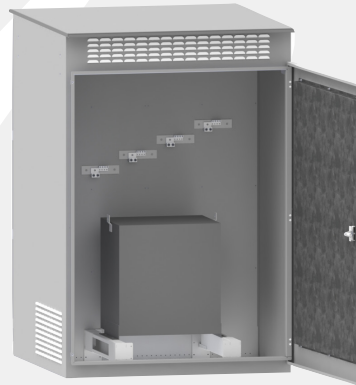

Contact Valid with voltage and power consumption requirements.