



Advanced Technology. Simple Solutions.

PARKING LOT CONTROLLER WITH ENERSAVE LOGIC, DISTRIBUTION PANEL, AND SECONDARY 3-POLE CONTACTORS

VPC-DG


The VPC-DG parking lot controller uses the Enersave logic to control multiple setpoints for parking lot applications. The weatherproof design is ideal for outdoor use. Standard PC101 Grey powder coat paint provides a durable finish. This line of parking lot controllers is all-encompassing with the breaker panel and secondary contactors located in a single pad-mount enclosure.

Features / Specifications

- Steel construction
- CSA Type 3R rated
- Padlockable handle
- Enersave temperature controller with:
 - Up to 4 customer-programmable temperature setpoints (recommended -5°C, -10°C, -15°C, -20°C)
 - Duration of cycle
 - Supervisory enable signal
- Easy field configuration via jumper settings
- 50/50 load share
- Standard 120/208V 3-phase
- HOA switch to bypass logic
- Temperature-sensing cable with weatherproof cover
- Circuit breaker panel
- Main contactor and circuit breaker panels
- Pad-mount design
- PC101 Grey powder coat finish

Options

- Higher amperage ratings
- Single phase (120/240V)
- Time-of-day clock
- Aluminum or stainless steel construction
- CSA type 1, 4, or 4X rated
- Remote-sensing thermostat
- Custom powder coat colours

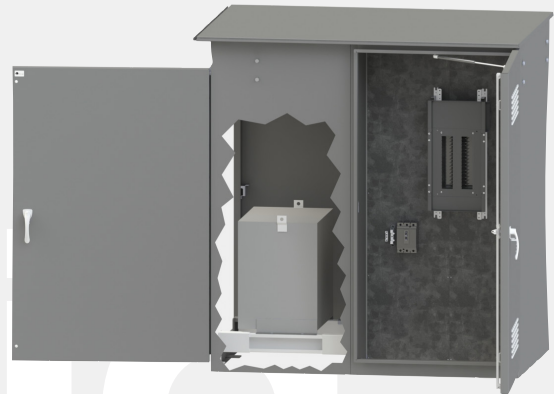

| PART NUMBER | KVA | PH | PRIMARY VOLTS | SECONDARY VOLTS |
|----------------|-------|----|---------------|-----------------|
| VPC-DG-240-30 | 30 | 1 | 600 | 240 |
| VPC-DG-240-37 | 37.5 | 1 | 600 | 240 |
| VPC-DG-240-50 | 50 | 1 | 600 | 240 |
| VPC-DG-240-75 | 75 | 1 | 600 | 240 |
| VPC-DG-240-100 | 100 | 1 | 600 | 240 |
| VPC-DG-240-167 | 167 | 1 | 600 | 240 |
| VPC-DG-208-30 | 30 | 3 | 600 | 208 |
| VPC-DG-208-45 | 45 | 3 | 600 | 208 |
| VPC-DG-208-75 | 75 | 3 | 600 | 208 |
| VPC-DG-208-112 | 112.5 | 3 | 600 | 208 |
| VPC-DG-208-150 | 150 | 3 | 600 | 208 |
| VPC-DG-208-225 | 225 | 3 | 600 | 208 |

