




Advanced Technology. Simple Solutions.

# WEATHERPROOF SPLITTER TROUGH (3 POLE)

## VS3R-3W

The VS3R-3W splitter trough is used in outdoor applications for protection from rain, sleet and snow. The removable hinged door allows easy access and additional safety by enabling the user to close the cover with one hand. These splitters are rated Type 3R and manufactured with galvanized steel for additional corrosion protection and are finished with PC101 (ANSI 61) grey powder coat paint.

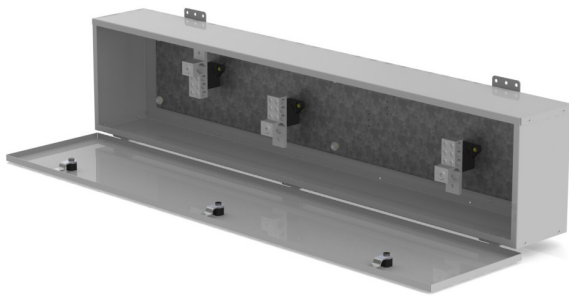

### Features/Specifications

- Galvanized steel construction
- CSA Type 3R rated
- Pour in place gasket
- 600V maximum, 3 pole
- Cu/Al rated lugs
- Hinged lid with quarter turn fasteners
- Mounting ears
- PC101 (ANSI 61) Grey powder coat finish
- Custom sizes, material and colour available

PART NUMBER	AMPS	HEIGHT (INCHES)	WIDTH (INCHES)	DEPTH (INCHES)	MAIN LUG RATINGS	BRANCH LUG RATINGS
VS3R-3W-125-24	125	8	24	6	(1) 1/0-14	(6) 2-14
VS3R-3W-125-36	125	8	36	6	(1) 1/0-14	(6) 2-14
VS3R-3W-125-48	125	8	48	6	(1) 1/0-14	(6) 2-14
VS3R-3W-125-60	125	8	60	6	(1) 1/0-14	(6) 2-14
VS3R-3W-125-72	125	8	72	6	(1) 1/0-14	(6) 2-14
VS3R-3W-225-24	225	8	24	6	(1) 300-6	(6) 2/0-14
VS3R-3W-225-36	225	8	36	6	(1) 300-6	(6) 2/0-14
VS3R-3W-225-48	225	8	48	6	(1) 300-6	(6) 2/0-14
VS3R-3W-225-60	225	8	60	6	(1) 300-6	(6) 2/0-14
VS3R-3W-225-72	225	8	72	6	(1) 300-6	(6) 2/0-14
VS3R-3W-400-24	400	10	24	6	(1) 600-4 or (2) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-400-36	400	10	36	6	(1) 600-4 or (2) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-400-48	400	10	48	6	(1) 600-4 or (2) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-400-60	400	10	60	6	(1) 600-4 or (2) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-400-72	400	10	72	6	(1) 600-4 or (2) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-600-48	600	10	48	6	(2) 600-4 or (4) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-600-60	600	10	60	6	(2) 600-4 or (4) 250-1/0	(4) 4/0-6 and (2) 3/0-14
VS3R-3W-600-72	600	10	72	6	(2) 600-4 or (4) 250-1/0	(4) 4/0-6 and (2) 3/0-14

Rev-1.1