


Equipment Trailer

Built to Valid's high standards, the Valid Mobile Equipment Trailer is a perfect way to transport generators, pumps, light towers, and more. Its beefy steel frame is fully primed and powder coated, with a total weight capacity of over 12,000 pounds.

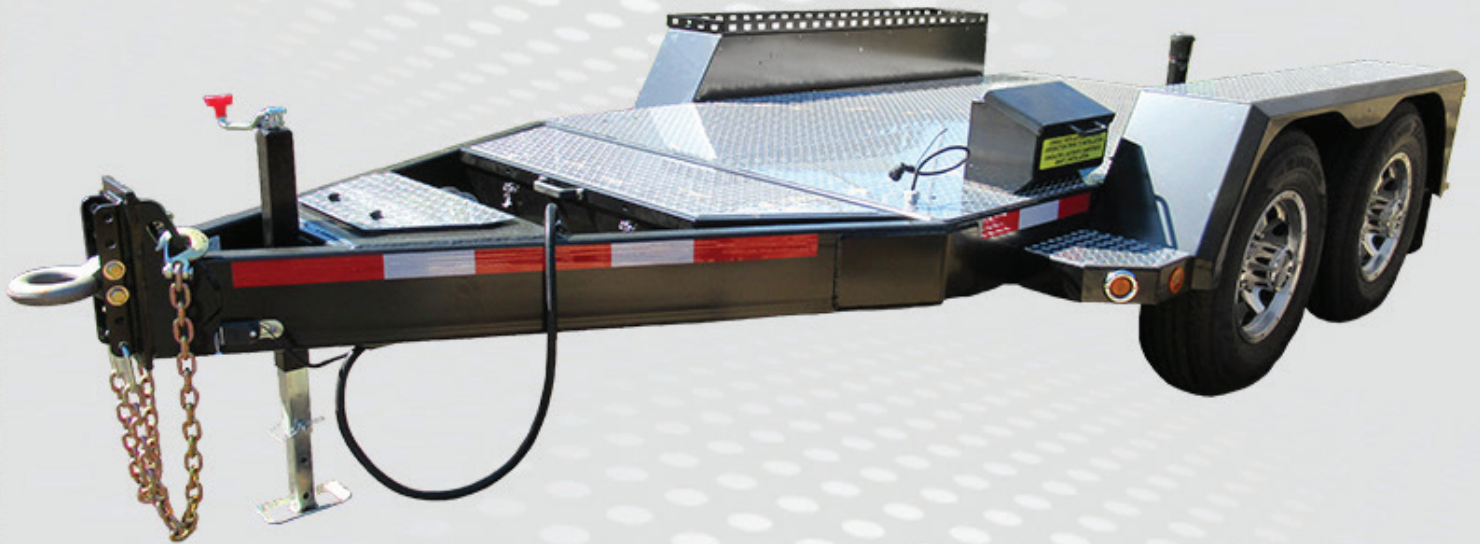

Advanced Technology. Simple Solutions.

1-888-632-6477 sales@validmfg.com validmfg.com

FEATURES

The trailer is supported with a dual tandem drop axle suspension, complete with tiedown loops, and stylish 16" alloy wheels. The 560 litre dual-wall fuel tank is certified to CAN-CGSB-43.146, UN31A, and ULC-S601; and provides peace of mind when navigating in environmentally sensitive areas. It is equipped with supply and return vents, and a fill pipe containment box that prevents spills while fueling.

An independent battery in the front compartment powers the trailer brakes in the event of a breakaway. Optional marine-grade checkerplate is found on all walking surfaces, with an optional storage tray on one fender and a watertight lockable toolbox in the front.



▲ Watertight toolbox



▲ Optional storage tray



▲ Fill pipe containment box



▲ Adjustable pintle hitch



▲ LED lights

HIGHLIGHTS

- Reliable equipment transportation
- Additional safety & security measures for extra personnel & equipment protection

SPECIFICATIONS

- LENGTH 4674 mm / 184"
- WIDTH 2362 mm / 93"
- HEIGHT 914 mm / 36"
- WEIGHT 1280 kg / 2820 lbs (empty fuel tank)
- GVWR 5750 kg / 12650 lbs
- WHEEL DIAMETER 16"
- AXLE LOAD 5443 kg/12,000 lbs (2721 kg/6,000 lbs per axle)



1-888-632-6477 sales@validmfg.com validmfg.com