




Advanced Technology. Simple Solutions.

BASE SERVICE DISCONNECTS

BSD

The BSD is a pole base mounted service panel used for street lighting distribution and control. This panel's compact, efficient design includes a removable door and is intended to be used within the pole base. Standard PC101 grey powder coat paint (aluminum versions only) provides a durable finish. The Type 3R weatherproof design can be used in both indoor and outdoor applications.


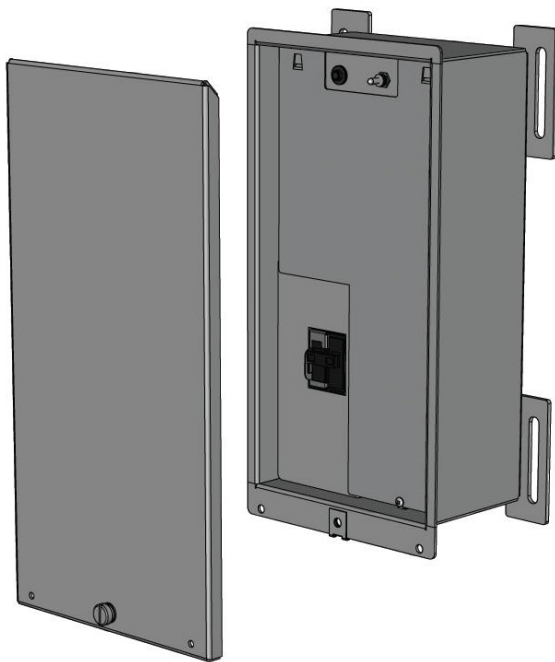


Features/Specification

- Service entrance rated
- CSA Type 3R rated
- Available in:
 - ▣ Marine grade aluminum powder coated PC 101 grey
 - ▣ Stainless steel 304 finish
- 60A AC-1 40A AC-3 3P Lighting rated contactor (LC1D40AG7)
- Photocell bypass switch
- Lock-out tab on main breaker
- Fits standard streetlight base
- 5A Mini control system breaker
- Wired to MMCD E7.5

Optional Component

- Additional contactor

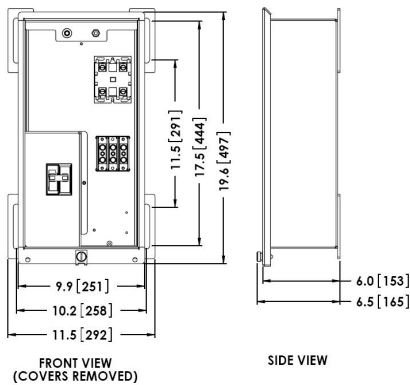

PART NUMBER	HEIGHT	WIDTH	DEPTH	MATERIAL	MAIN BREAKER
BSD3A18	20"	10"	6"	ALUMINUM	30A
BSD3S18	20"	10"	6"	STAINLESS STEEL	30A
BSD4A18	20"	10"	6"	ALUMINUM	40A
BSD4S18	20"	10"	6"	STAINLESS STEEL	40A
BSD6A18	20"	10"	6"	ALUMINUM	60A
BSD6S18	20"	10"	6"	STAINLESS STEEL	60A

FOR ADDITIONAL OPTIONS CONSULT FACTORY

Rev-1.1