



Advanced Technology. Simple Solutions.

BASE SERVICE DISCONNECTS

BSD



The BSD is a pole base mounted service panel used for street lighting distribution and control. This panel's compact, efficient design includes a removable door and is intended to be used within the pole base. Standard PC101 Grey powder coat paint (aluminum versions only) provides a durable finish. The Type 3R weatherproof design can be used in both indoor and outdoor applications.

Features / Specification

- Service entrance rated
- CSA Type 3R rated
- Available in:
 - Marine-grade aluminum powder coated PC101 Grey
 - Stainless steel 304 finish
- 60A AC-1 40A AC-3 3P lighting rated contactor (LC1D40AG7)
- Photocell bypass switch
- Lock-out tab on main breaker
- Fits standard streetlight base
- 5A mini control system breaker
- Wired to MMCD E7.5

Options

- Additional contactor

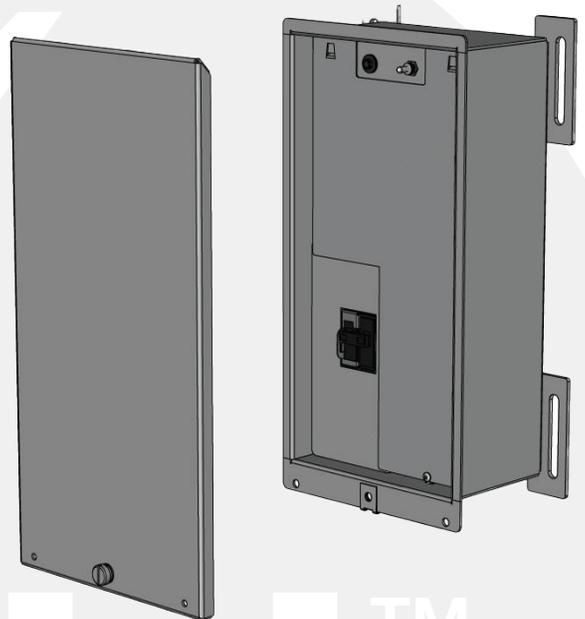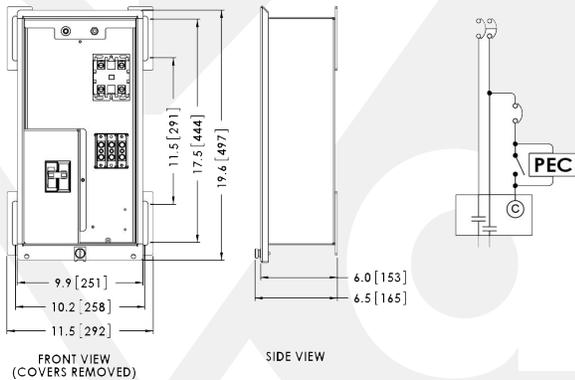

PART NUMBER	HEIGHT	WIDTH	DEPTH	MATERIAL	MAIN BREAKER
BSD3A18	20 in	10 in	6 in	ALUMINUM	30A
BSD3S18	20 in	10 in	6 in	STAINLESS STEEL	30A
BSD4A18	20 in	10 in	6 in	ALUMINUM	40A
BSD4S18	20 in	10 in	6 in	STAINLESS STEEL	40A
BSD6A18	20 in	10 in	6 in	ALUMINUM	60A
BSD6S18	20 in	10 in	6 in	STAINLESS STEEL	60A

Contact Valid for all available options.