



Advanced Technology. Simple Solutions.

METERED PAD-MOUNT CAMPGROUND PEDESTAL

RVPM


This pedestal style is a pad-mount design providing the RV owner with a single power point. All receptacles are protected by breakers on the pedestal and the check meter allows monitoring of power consumption.

Features / Specifications

- Galvanized steel construction
- Aluminum cap for additional corrosion protection
- CSA Type 3R rated
- Loop feed power termination lugs
- 10kAIR branch rated breaker protection
- While-in-use padlock cover
- 100A meter socket
- PC113 Parks Green powder coat finish
- 34 in (H) x 7 in (W) x 5.25 in (D) galvanized steel construction
- 10-in x 10-in base plate
- Standard splitter blocks #14-2/0

Options

- Template and 4 anchor bolts, nuts, and washers (P/N: PAB-RVPM)
- Top light
- Side light
- Photocell
- Low voltage section with cable telephone or network outlets
- Remote metering systems
- Custom lug configurations
- Custom powder coat colours including beige, grey, and white

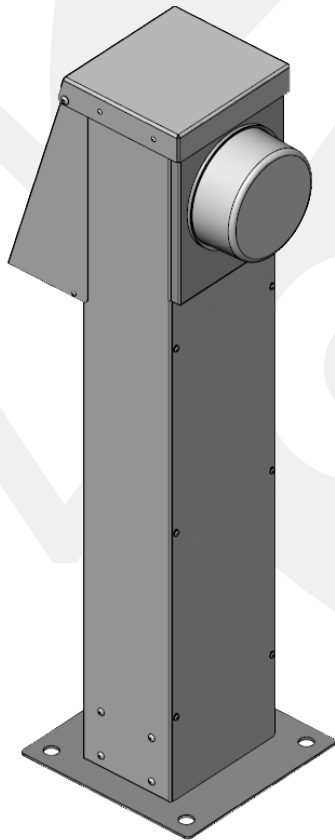

PART #	RECEPTACLES		BREAKERS	
	QTY	TYPE	QTY	TYPE
RVPM1	1	15A GFI DUPLEX	1	15A 1P
RVPM2	2	15A GFI DUPLEX	2	15A 1P
RVPM3	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVPM4	1	15A GFI DUPLEX	1	15A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVPM5	1	15A GFI DUPLEX	1	15A 1P
	1	50A 125/250V	1	50A 2P
RVPM6	1	20A GFI DUPLEX	1	20A 1P
RVPM7	2	20A GFI DUPLEX	2	20A 1P
RVPM8	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
RVPM9	1	20A GFI DUPLEX	1	20A 1P
	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVPM10	1	20A GFI DUPLEX	1	20A 1P
	1	50A 125/250V	1	50A 2P
RVPM11	1	30A 125V CROWFOOT	1	30A 1P
	1	50A 125/250V	1	50A 2P
RVPM14	1	30A 125V CROWFOOT	1	30A 1P
RVPM16	1	50A 125/250V	1	50A 2P
RVPM17	2	30A 125V CROWFOOT	2	30A 1P
RVPM18	2	50A 125/250V	2	50A 2P

Additional part numbers and configurations on next page.





Advanced Technology. Simple Solutions.

METERED PAD-MOUNT CAMPGROUND PEDESTAL RVPM

ALTERNATE RECEPTACLE CONFIGURATION (MAXIMUM 3)

ADD TO PART NUMBER e.g. RVPM-AAM-PSV

RECEPTACLE	BREAKER	ADDER
15A DUPLEX GFI	15A 1P	A
20A DUPLEX GFI	20A 1P	B
15A DUPLEX	15A 1P	D
20A DUPLEX	20A 1P	E
15A TL 125V	15A 1P	F
20A TL 125V	20A 1P	G
30A CROWFOOT 125V	30A 1P	H
30A TL 125V	30A 1P	J
30A 125/250V	30A 2P	K
50A 125/250V	50A 2P	M
50A 125/250V TL	50A 2P	Q

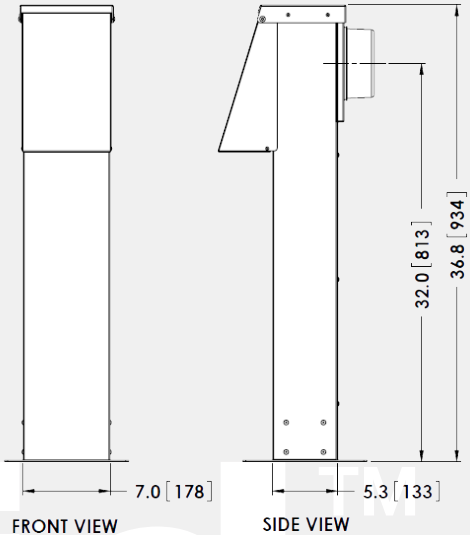

ADDITIONAL COMPONENTS

ADD TO PART NUMBER e.g. RVPM4-PSV

OPTIONS	ADDER
CUSTOM LUGS (UP TO 250 MCM FEED THRU)	L2
CUSTOM LUGS (UP TO 600 MCM FEED THRU)	L6
CUSTOM LUGS (OTHER CONFIGURATIONS)	LL
CABLE	C
TELEPHONE	V
NETWORK	N
TOP LIGHT	T
SIDE LIGHT	S
PHOTOCELL	P
SINGLE WATER FAUCET	W1
DOUBLE WATER FAUCET	W2

